

BR462 Pro

LED Display Control Board



Specifications

Change History

Document Version	Release Date	Description
V1.0.1	2026-09-04	Added certification.
V1.0.0	2026-07-03	First release

Introduction

The BR462 Pro is an LED display control board developed by NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar). Built in with a power module, it can convert 90 Vac to 264 Vac input into DC power to directly drive the modules. Furthermore, the product offers functions such as undervoltage, overvoltage, overcurrent, overpower, and short-circuit protection, ensuring safety, high efficiency, and good reliability.

Supporting various functions such as Full-Grayscale Calibration, LED Image Booster, Thermal Compensation 2.0, HDR, Pixel Level Brightness and Chroma Calibration, Quick Adjustment of Dark or Bright Lines, Low Latency, 3D, Individual Gamma Adjustment for RGB and 90° Image Rotation, the product can significantly improve the display effect and user experience.

The product uses 4 floating connectors for communication, ensuring high stability. It supports up to 24 groups of parallel RGB data and is suitable for various on-site setups.

For PWM driver ICs, the maximum load capacity per card is:

- 512×512@60Hz (For 8-bit video sources)
- 512×384@60Hz (For 10-bit and 12-bit video sources)



Note

For PWM driver ICs, the maximum load capacity per card when used with COEX controllers is:

- 512×512@60Hz (For 8-bit and 10-bit video sources)
- 512×384@60Hz (For 12-bit video sources)

Certifications

RoHS

If the product lacks the certifications required for sale in the destination country or region, please contact NovaStar promptly for confirmation or assistance. Otherwise, the customer

shall bear any resulting legal risks and liabilities, and NovaStar reserves the right to seek compensation.

Features

- Smart Power Supply

- Basic Power Supply Information Readback: Support reading back and displaying basic power supply information via NovaLCT.
- Smart Voltage Adjustment: Support adjusting the main output voltage via NovaLCT, flexibly accommodating the power requirements of various LED modules and driver ICs to enhance compatibility.
- Smart Sleep Settings: Support one-click power-off and automatic sleep mode upon signal or network loss for the display via NovaLCT, effectively reducing system power consumption.

- Power Module and Receiving Card in One Package

The product supports input voltage of 90 Vac to 264 Vac and converts it to direct current to directly power the modules. Furthermore, it offers functions such as undervoltage, overvoltage, overcurrent, overpower, and short-circuit protection.

- Full-Grayscale Calibration

Work with NovaStar's high-precision calibration system and scientific-grade camera to generate unique calibration coefficients for each grayscale, ensuring uniformity of each grayscale and significantly improving the image quality.

- LED Image Booster (Effects depend on driver IC)

- Color Management: Support standard (Rec.709 / DCI-P3 / Rec.2020) and custom color gamuts, enabling more precise colors on the screen.
- Precise Grayscale: Individually correct the 65,536 levels of grayscale (16bit) of the driver IC to fix the display problems at low grayscale conditions, such as low-grayscale brightness spikes, brightness dips, color cast and mottling. This function can also better assist other display technologies, such as 22bit+ and individual gamma adjustment for RGB, allowing for a smoother and more uniform image.
- 22bit+: Improve the LED screen grayscale by 64 times to avoid grayscale loss due to low brightness and allow for a smoother image with more details in dark areas.

- Thermal Compensation 2.0

Work with NovaStar's high-precision calibration system to precisely collect the thermal distribution data of LED cabinets and generate unique thermal compensation data for each

pixel, effectively eliminating cabinet- or module-level cyan or red cross-hatch patterns caused by uneven thermal distribution.

- HDR

- Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards.
- Support HLG.

- Pixel Level Brightness and Chroma Calibration

Work with NovaStar's calibration system to calibrate the brightness and chroma of each pixel, effectively eliminating differences and enabling high consistency for both brightness and chroma.

- Quick Adjustment of Dark or Bright Lines

The different brightness of seams caused by splicing of modules or cabinets can be corrected to improve the visual experience. The correction is easy and takes effect immediately.

- Multi-batch Adjustment

Adjust the brightness and chroma of cabinets or modules to minimize display discrepancies caused by variations in production batches.

- Low Latency

The latency of the video source at the receiving card end can be reduced to 1 frame (only when using modules with driver ICs with built-in RAM).

- 3D

Work with the controller that supports 3D function to enable 3D output.

- Individual Gamma Adjustment for RGB

Working with NovaLCT and the controller that supports this function, the receiving card supports individual adjustment to red gamma, green gamma and blue gamma, which can effectively control image non-uniformity at low grayscale conditions and white balance offset, allowing for a more realistic image.

- 90° Image Rotation

The display image can be rotated in multiples of 90° (0°/90°/180°/270°).

- Free Image Rotation

Support image rotation at any angle when using the dedicated MCTRL R5 controller and SmartLCT software.

- Smart Module (dedicated firmware required)

Work with the smart module to support module ID management, storage of calibration coefficients and module parameters, monitoring of module temperature, voltage and ribbon cable communication status, and LED error detection.

- Calibration Coefficient Management

The calibration coefficients can be uploaded, read back, saved to hardware, and erased.

- Automatic Module Calibration

After a new module with flash memory is installed to replace the old one, the calibration coefficients stored in the flash memory can be automatically uploaded to the receiving card when it is powered on, which ensures unchanged uniform display brightness and chroma.

- Uploading Calibration Coefficients

Upload calibration coefficients to the receiving card quickly or in a stable manner, with acceleration support if needed.

- Module Flash Management

For modules with flash memory, the information stored can be managed, allowing for the storage and readback of calibration coefficients and module IDs.

- One-click to Apply Calibration Coefficients in Module Flash

For modules with flash memory, when the Ethernet cable is disconnected, users can hold down the self-test button on the cabinet to upload the calibration coefficients in the module Flash to the receiving card.

- Data Group Mapping

Display the test pattern by data group to clearly show the position of each data group within the cabinet.

- Mapping 1.1

The cabinet displays the Ethernet port, receiving card, and controller numbers in different colors, clearly showing the physical locations and connection topology of receiving cards.

- Temperature and Voltage Monitoring

The receiving card temperature and voltage can be monitored without using peripherals.

- Settings of a Stored Image in the Receiving Card

The image displayed during startup, or displayed when the Ethernet cable is disconnected or there is no video signal.

- Bit Error Detection

Monitor the number of erroneous packets in the Ethernet data transmission of the receiving card to help troubleshoot network communication problems.

- Detection of Ethernet Cable Disconnections

Monitor the number of times the Ethernet cable to the receiving card is disconnected, assisting in identifying potential communication link issues.

- Firmware Program Readback

The receiving card firmware program can be read back and saved to the local computer.

- Configuration Parameter Readback

The receiving card configuration parameters can be read back and saved to the local computer.

- Dual NCP Backup

The NCP file is stored in the application area and factory area of the receiving card at the same time. Typically, the NCP file in the application area is used. However, during a factory reset, the NCP file can be retrieved from the factory area.

- Loop Backup

The receiving card and controller form a loop via the primary and backup line connections. When a fault occurs at a location of the lines, the screen can still display the image normally.


- Dual Backup of Configuration Parameters

The receiving card configuration parameters are stored in both the application area and factory area of the receiving card at the same time. Users usually use the configuration parameters in the application area. If necessary, users can restore the configuration parameters in the factory area to the application area.

- Dual Program Backup

Two copies of the firmware program are stored in the receiving card at the factory to avoid the problem that the receiving card may get stuck abnormally during program update.

Appearance

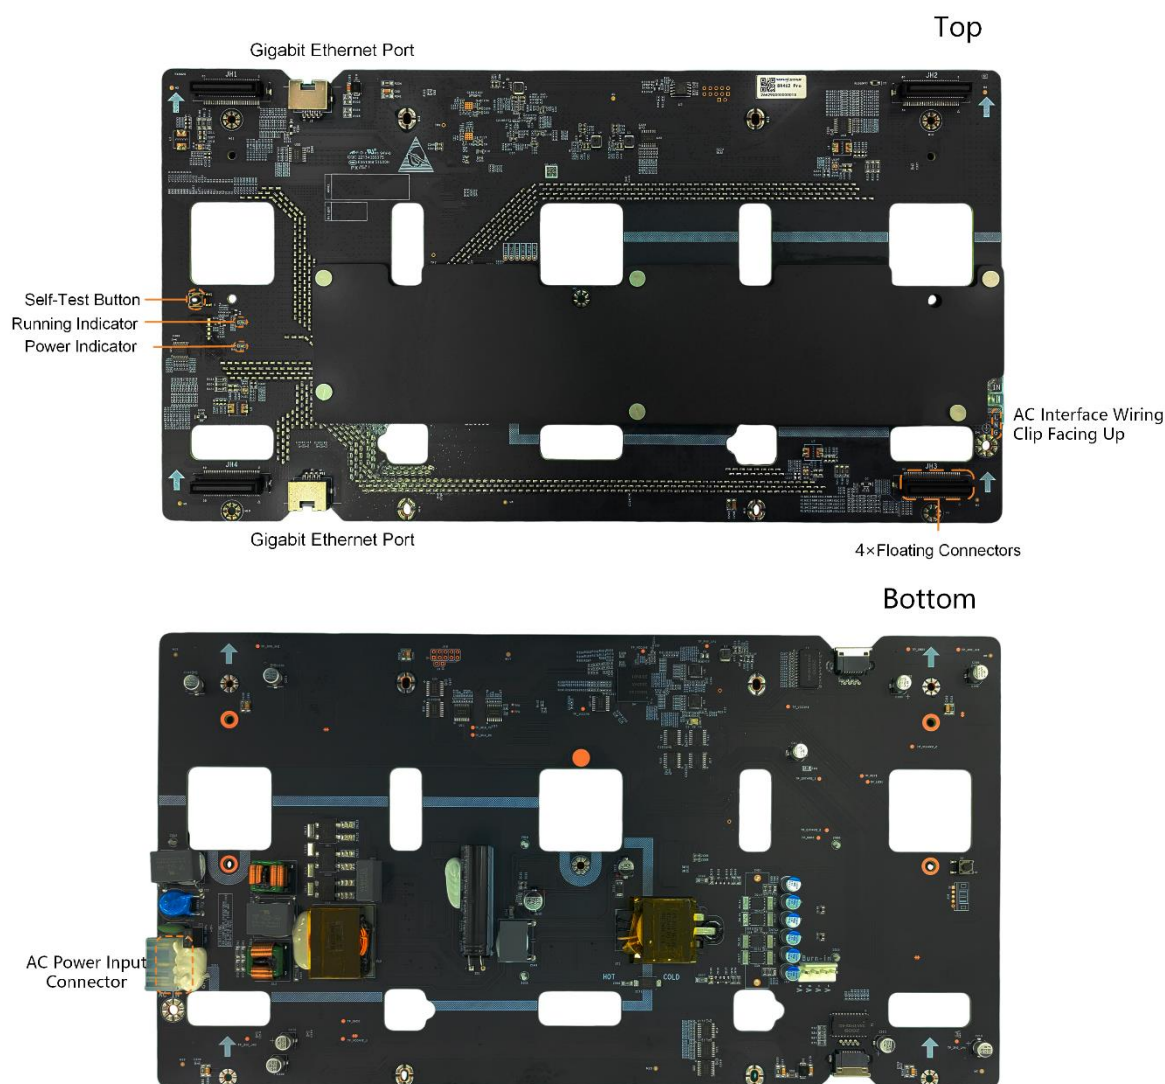

Product images are for reference only. The actual product may vary.


Indicators


Indicators	Color	Status	Description
Running indicator	Green	Flashing once every 1s	The receiving card is functioning normally. Ethernet cable connection is normal, and video source input is available.
		Flashing once every 3s	Ethernet cable connection is abnormal.
		Flashing 3 times	Ethernet cable connection is normal, but video source

Indicators	Color	Status	Description
		every 0.5s	input is unavailable.
		Flashing once every 0.2s	The receiving card failed to load the program in the application area and is now using the backup program.
		Flashing 8 times every 0.5s	A redundancy switchover occurred on the Ethernet port and the loop backup has taken effect.
Power indicator	Red	Always on	The power input is normal.

Dimensions

The board thickness is not greater than 2.0 mm, and the total thickness (board thickness + thickness of components on the top and bottom sides) is not greater than 25.0 mm.

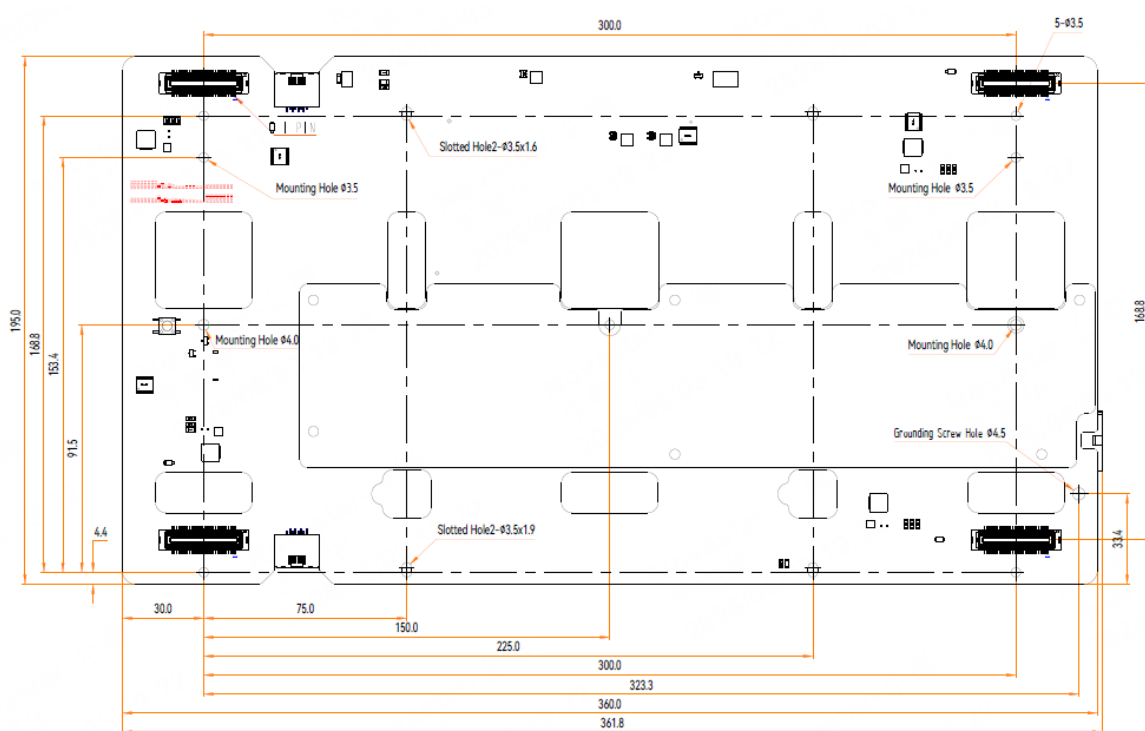

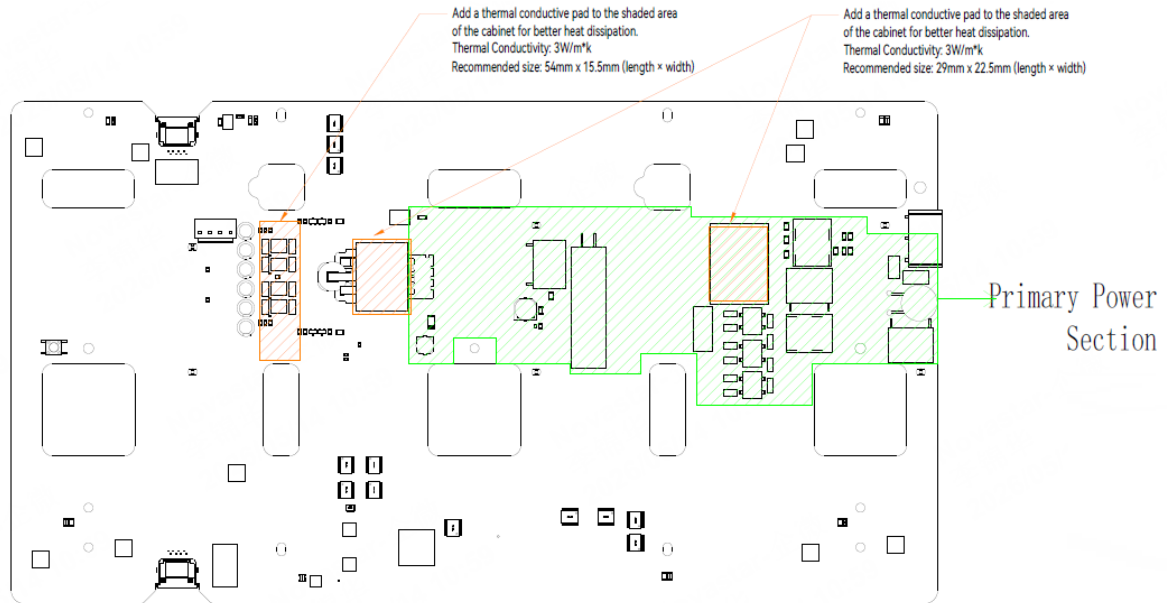

Tolerance: ± 0.3 Unit: mm

Note

- For molding or installation cutouts, please contact NovaStar for a higher-precision structural drawing.
- The thermal conductive pad and silicone insulation pad are not included with the product. You will need to adhere them yourself according to the specified positions and sizes in the diagram. Attach the thermal conductive pad to the card, ensuring the thickness is appropriate for the available space in the cabinet and that it is compressed when in place. The silicone insulation pad should be adhered to the cabinet.
- The green shaded area in the diagram is the primary power section. Ensure a safety distance of at least 5 mm between this area and the metal conductor of the cabinet. If this distance is not met, add a silicone insulation pad for additional insulation. Design the silicone pad to extend more than 5 mm beyond the primary power section.
- For other areas, maintain a safety distance of at least 2 mm from the cabinet.
- The silicone pad should be 0.23 mm thick, with a voltage resistance of ≥ 4 kV AC and a thermal conductivity of ≥ 1.6 W/(m·K).

Pin Definitions (Taking JH1 as an example)					
/	H_G2	25	26	H_G4	/
/	H_B2	27	28	H_B4	/
/	H_R21	29	30	H_R5	/
Row decoding signal	HA1	31	32	H_G5	/
Row decoding signal	HB1	33	34	H_B5	/
Row decoding signal	HC1	35	36	FLASH1_3V3	/
/	H_G21	37	38	HUB_SPI_MISO1	Module flash data storage output
Latch signal.	HLAT1	39	40	HUB_SPI_CS1	CS signal of serial pin
Display enable signal	HOE1	41	42	HUB_SPI_MOSI1	Module flash data storage input
Shift clock signal	HDCLK1	43	44	HUB_SPI_CLK1	Clock signal of serial pin
/	H_B21	45	46	VCC3.0_1	/
Ground	GND	47	48	VCC3.0_1	/
	GND	49	50	VCC3.0_1	/
	GND	51	52	VCC3.0_1	/
	GND	53	54	VCC3.0_1	/
	GND	55	56	VCC3.0_1	/
	GND	57	58	VCC3.0_1	/
	GND	59	60	VCC3.0_1	/

Electrical Specifications

Input Specifications


Input Voltage	90 Vac to 264 Vac
---------------	-------------------


Nominal Input	100 Vac to 240 Vac
Frequency Range	47 Hz to 63 Hz
Starting Voltage	> 70 Vac
Maximum Input Current	1.8 A
Inrush Current	Cold start: 100 A at 240 Vac, 50 A at 100 Vac
Power Factor	@240 Vac, ≥ 0.90 ; @100 Vac, ≥ 0.97 (tested under 32 A conditions)
Current Harmonics	GB 17625.1; EN61000-3-2, -3
Standby Power Consumption	≤ 4 W
Input Fuse	T5AL/250 Vac

Output Specifications

Output Current	32 A (Rated) Note: The peak current is tested with a pulse width of less than 100 ms and at an ambient temperature of 30°C.
Output Voltage	Default: 4.0 V Voltage adjustment is available via the NovaLCT software.
Output Voltage Accuracy	± 2.0 %
Line Regulation	± 2.0 %
Load Regulation	± 2.0 %
Output Ripple Noise	≤ 200 mV Note: In an environment of 25°C, the bandwidth is set to 20 MHz. A 0.1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor are connected in parallel at the output for testing.
Temperature Coefficient	Pending
Dynamic Load Performance	0% to 50% load and 50% to 100% load, < 10%
Efficiency	@ 240 Vac, 88%, CH1 32 A @ 100 Vac, 84%, CH1 32 A

Output Rise Time	30.0ms max Note: Rise time is defined as the time it takes for the output voltage to increase from 10% to 90%. This is tested with a 0.1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor connected in parallel at the output.
Start-up Delay Time	Max 1s at 220 Vac
Output Hold Time	@ 240 Vac, 15ms @ 100 Vac, 10ms
Output Voltage Overshoot	10% max Note: All DC output currents should range from minimum to maximum values.
Capacitive Load	32000 μ F
Ratio Radiation Emission	Pending
Switching Frequency	Pending
Power Temperature Derating	-20°C to +70°C (Above 50°C, reduce load by 1.5% for every additional 1°C)
Power Input Voltage Derating	Between 90 Vac and 100 Vac, for every 1 V decrease, reduce load by 1.5%
MTBF	At least 100,000 hours at full load under 25°C ambient temperature with normal input

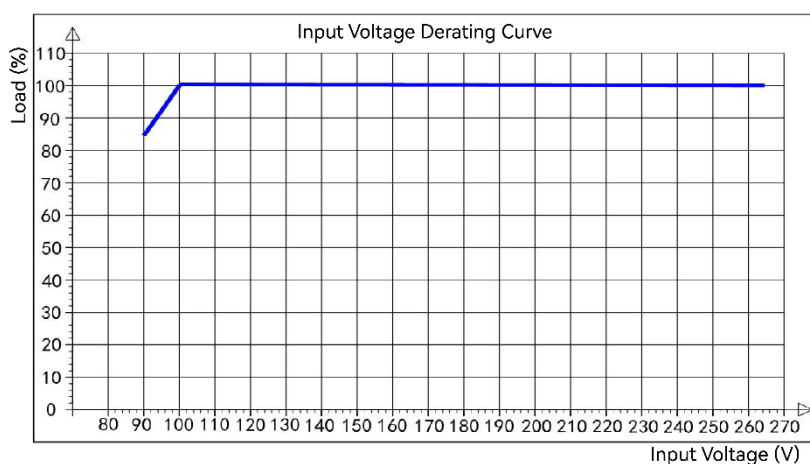

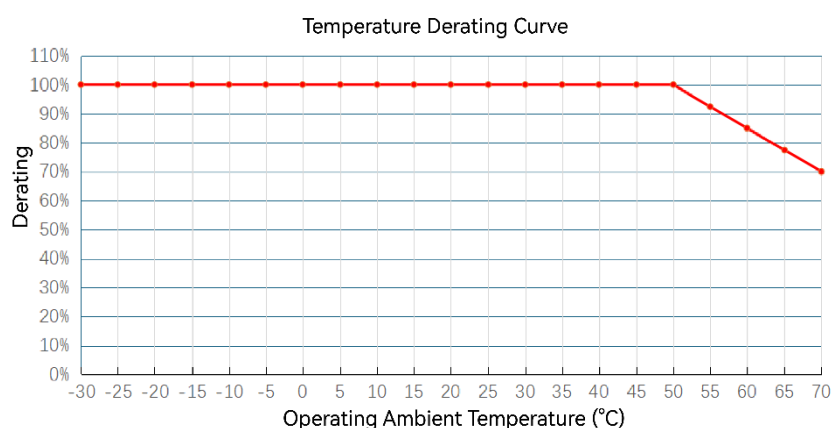

Protection

Input Undervoltage Protection	Engages above 70 Vac, disengages below 65 Vac
Output Overvoltage Protection	< 6.5 V, self-recovery
Output Overcurrent Protection	Triggered at 1.3 to 1.6 times of rated current
Output Overpower Protection	Triggered at 1.3 to 1.6 times of rated current
Output Short-circuit Protection	Self-recovery

Security

Insulation Resistance	Input to output 500 Vdc, 100 MΩ min (at room temperature) Input to FG 500Vdc, 100 MΩ min (at room temperature) Output to FG 500Vdc, 100 MΩ min (at room temperature)
Insulation Withstand Voltage	Input to output (I/P-O/P): 3.0 kVac / 10 mA Input to case (I/P-CASE): 1.8 kVac / 10 mA Output to case (O/P-CASE): 500 Vdc / 10 mA Note: This specifies the AC withstand voltage. The DC withstand voltage is 1.414 times the AC value, with the same leakage current limit.
Ground Resistance	< 0.1 Ω
Leakage Current	IEC 62368-1

 Note

If there are lightning protection components in the circuit, the following steps should be taken during the voltage withstand test after disconnecting the air gap tube:

- The input lines (L&N) need to be short-circuited together, and all the output lines need to be short-circuited together.
- Input to output: Input short-circuit line to output short-circuit line test.
- Input to FG: Input short-circuit line to FG.

EMC

Conducted Emission	GB/T9254.1-2021/EN55032/FCC, Class A
Radiated Emission	GB/T9254.1-2021/EN55032/FCC, Class A
Power Fluctuation and Flicker	Pending
Radiated Susceptibility	EN55024; EN61000-4-2, 3, 4, 5, 6, 8, 11
Conducted Susceptibility	EN55024; EN61000-4-2, 3, 4, 5, 6, 8, 11
Surge Susceptibility	GB17626.5/IEC61000-4-5 Performance Criteria: B DM: ± 2 kV, CM: ± 4 kV
EFT Immunity	GB17626.4/IEC61000-4-4 Performance Criteria: B ± 3 kV
ESD Immunity	GB17626.2/IEC61000-4-2 Performance Criteria: B Contact ± 4 kV, Air ± 8 kV
Voltage Fluctuation and Flicker	Pending
Voltage Drop	GB17626.11/IEC61000-4-11 Performance Criteria: B/C

Voltage Drop Requirements:

Voltage Drop	Duration	Performance Criteria
0% Ut	10 ms	B
70% Ut	500 ms	C
40% Ut	200 ms	C
0% Ut	5000 ms	C



Caution

It is required to comply with the above-mentioned standards as a whole system.

Specifications

Maximum Resolution	For PWM driver ICs, the maximum load capacity per card is: • 512×512@60Hz (For 8-bit video sources) • 512×384@60Hz (For 10-bit and 12-bit video sources)	
Operating Environment	Temperature	−20°C to +70°C
	Humidity	0% RH–85% RH, non-condensing
	Altitude	−60 m to +5000 m Note: For every 100 meters above 2000 meters in altitude, the maximum operating temperature decreases by 0.5°C.
Storage Environment	Temperature	−40°C to +85°C
	Humidity	0% RH–85% RH, non-condensing
	Altitude	< 5000 m
Physical Specifications	Dimensions	361.8 mm × 195.0 mm × 22.6 mm
	Net weight	351.5 g Note: It is the weight of a single receiving card only.
Packing Information	Packing specifications	An antistatic bag and anti-collision foam are provided for each receiving card. Each packing box contains 14 receiving cards.
	Packing box dimensions	635.0 mm × 595.0 mm × 283.0 mm

Copyright

Copyright © 2026 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| [Official website](http://www.novastar.tech)
| www.novastar.tech

| [Technical support](mailto:support@novastar.tech)
| support@novastar.tech