

MX2000 Pro

LED Display Controller



Specifications

Change History

Document Version	Release Date	Description
V1.5.1	2026-04-30	<ul style="list-style-type: none"> Added the MX_8x5G_Base-T output card and MX_1xHDMI 2.0+1x12G-SDI MVR output card. Updated the rear panel diagram. Updated fiber optic transmission distances. Added the noise level. Updated the load capacity loss description.
V1.5.0	2025-09-30	<ul style="list-style-type: none"> Added MX_1xST 2110 (100G) and MX_1xDP 1.4 (8K@60Hz) input cards. HDMI 2.0 input supports YCbCr 4:2:0 color sampling format. Supports Art-Net protocol control, central control protocol, and viewing of device MAC address. Supports SPDIF audio output.

Introduction

The MX2000 Pro is a large professional 8K LED display controller from Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar), designed as part of the COEX control system series. Its remarkable features include 12-bit color depth, 480 Hz capability, real-time multi-screen scaling, 0-frame latency, and HDR supportability, providing precise brightness control, true-to-life color fidelity, and an excellent image quality. Its card-based modular design is specifically tailored for future LED displays, allowing for flexible input and output card configurations that are stable and easy to maintain. With a compact 2U size, it supports up to 8x 4K@60Hz or 4x 8K@30Hz video inputs, with a maximum load capacity of 35.38 million pixels, making it ideal for large-screen configurations.

The MX2000 Pro offers a wide range of options with up to 10 different input cards supporting 8K, 4K, and VoIP. For output, it supports 2 types of output cards: 4x 10G fiber, 1x 40G fiber. These cards can be configured flexibly to accommodate either 1G or 5G bandwidth for the control system, catering to different requirements. Additionally, it supports seamless backup and automatic switching between devices, cards, and Ethernet ports. In case of any malfunction, it promptly switches over while issuing automatic alerts, ensuring stable output on-site. To further enhance the user experience, it is complemented by the advanced control software, VMP, enabling users to have better control and management capabilities.

The MX2000 Pro offers many advantages such as highly integrated design, premium image quality, powerful performance, tremendous load capacity, and easy control. It is widely used in rental services for large events, xR/VP studios, large fixed installation applications, TV production, e-sports events, exhibition halls, and other application scenarios.

Certifications

CE, RoHS, FCC, IC, UL, CB, EAC, PSE, RCM, KC

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem.

Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Inputs and Outputs

- 2x input card slots, users may choose input cards of the following types:
 - 4K input cards
4x HDMI 2.0, 4x DP1.2, 4x 12G-SDI
 - 8K input cards
1x DP 1.4 (8K@60Hz), 2x HDMI 2.1, 2x DP 1.4, 1x DP 1.4 + 1x HDMI 2.1
 - VoIP card (Video over IP)
1x ST 2110 (100G), 1x ST 2110 (25G), 2x ST 2110 (25G)
- Authentic 12bit video input
12-bit/10-bit/8-bit supported
- 2x output card slots, users may choose output cards of the following types:
 - 1x40G fiber output card
Work with CVT8-5G fiber converter to achieve 5G transmission (capable of loading 2,600,000 pixels in a single Ethernet cable).
 - 4x10G fiber output card
Work with CVT10 fiber converter to achieve 1G transmission (capable of loading 650,000 pixels in a single Ethernet cable).

- 5G output card
 - 8×5G Base-T
- Supports real-time previewing and monitoring of the video source input and LED screen display status.
- Supports frame rates of up to 480 Hz (max frame rate is decided by the screen's hardware configuration).

Screen Management

- Card-based Screen

Each screen can be customized to have a different output resolution from the other screens.
- Synchronized Output Splicing

With the help of frame synchronization, the output images on the same screen are completely synchronized. This enables the output to deliver smooth playback and perfect image without issues such as picture stutter, frame loss, image tearing, and noticeable cut lines.
- Preset

For optimal display in various scenarios, users can adjust display parameters such as layers, brightness, color temperature, and gamma ahead of time and save them as presets. Users can save up to 128 customizable presets which can be easily applied or switched with just one click.
- No rectangle restriction

No rectangle restriction for irregular screens. This means when calculating resolutions, blank pixels do not count towards the total capacity. The used load capacity of Ethernet ports is the sum of the resolutions of all cabinets with load.

Advanced Features

- Multi-Layer

A single output card supports up to 4x layers or the entire controller supports up to 8x 4K layers.
- Image Scaling

Each layer supports 4 scaling mode: custom, pixel to pixel, snap to canvas, and fill screen.

- Layer Roaming

Supports cross-card output of layers within the screen.
- Color Replacement

Replace any color in the image with another color without affecting other colors. It is recommended to choose color with higher saturation for replacement to achieve better outcome.
- 14Ch Color Correction

Supports precise adjustment to the hue, saturation, and brightness of black and white, and the 12 standard colors derived from the three primary colors (RGB).
- Color Curves

Supports adjustment to the RGBW mapping curves of the screen.
- 3D LUT

Use the 3D LUT file (.cube) with an accuracy of 17×17×17 / 33×33×33 / 65×65×65 to adjust the colors of the video source.
- Full-Grayscale Calibration

Work with NovaStar's high-precision calibration system CC3 along with the scientific-grade cameras CC60 and C3200 to generate unique calibration coefficients for each grayscale, ensuring uniformity of each grayscale and dramatically improving the image quality.
- HDR
 - Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards.
 - Support HLG.
- 3D

Work with the 3D emitter and 3D glasses to bring a fascinating and immersive 3D viewing experience.
- Latency
 - Different screens can have different latency settings. The minimum processing latency of the LED display controller is reduced to 0-frame (less than 1 ms), achieving low latency without reducing the load.
 - Supports additional latency. Users can choose to add zero to two frames of latency.
- Frame Rate Adaptive

Automatically adapt to video inputs with different frame rates ranging from 23.98 Hz to 480 Hz, and support the automatic calculation of optimal screen parameters based on the input source's frame rate. This ensures that the brightness deviation of the screen remains within

5% across different frame rates. It also supports precise frame rate adjustment in 0.01 Hz increments.

- Shutter Fit

Automatically adjusts the driver IC parameters according to the camera shutter angle to fix problems of black lines, grayscale addition, and grayscale loss during camera shooting in xR scenarios.

- Frame Multiplication

- Frame interpolation: Outputs images that are captured from multiple shooting angles with different backgrounds at the same time. Solid green backgrounds can also be inserted to allow for easy post-production adjustments.

- Frequency multiplication: Supports high frame rates of up to 480 Hz. This feature is to accommodate multi-angle camera shooting to improve the screen performance under the camera.

Device Controls

- LCD touch panel

Equipped with a 5-inch touch screen, which is responsive, sturdy and durable. Users can easily give commands with a gentle touch, making the operation effortless.

- VMP software control

The device can be connected to the VMP software to provide easy and convenient operations and smart device management.

- Supports the SNMP, Art-Net, and central control protocols.

- Cascading control via Ethernet

The Gigabit Ethernet control ports support TCP/IP protocol and star topology. No switch or router is needed to deploy multiple devices on the same LAN via device cascading as the network switching function is already built in.

- Automated system monitoring and alarm

Hardware monitoring capabilities that encompass fan speed, module temperatures, voltage levels, and operational status. It automatically detects and reports any device faults or alarm information, ensuring real-time monitoring of the LED screen's operational status.

- Device backup
 - Hot backup between devices.
 - Hot backup between output cards.
 - Hot backup between Ethernet ports.

Table 4-1 Function limitations


Function	Limitation	
	1G solution (4x10G fiber output card)	5G solution (1x40G fiber output card)
Frame Rate Adaptive	To use this function, it is required to pair with the A10s Pro and its derivative receiving cards and specific driver ICs (for detailed IC models, please see the product specifications on the NovaStar website at https://www.novastar.tech/). Additionally, you must use the Cabinet Tool provided by NovaStar to adjust the driver IC parameters for different frame rates, which will generate the required NCP file.	To use this function, it is required to pair with the XA50 Pro or CA50E receiving cards and specific driver ICs (for detailed IC models, please see the product specifications on the NovaStar website at https://www.novastar.tech/). Additionally, you must use the Cabinet Tool provided by NovaStar to adjust the driver IC parameters for different frame rates, which will generate the required NCP file.
Full-Grayscale Calibration	It is required to work with the A10s Pro\A8s Pro receiving card or their derivatives. Users need to use a CC60\C3200 camera to perform full-grayscale calibration.	It is required to work with the XA50 Pro or CA50E receiving cards and users need to use a CC60\C3200 camera to perform the full-grayscale calibration.
Calibration Software	COEX V1.5.0 and later versions no longer support the Calcube2.X. Please use the official version of the CC3 calibration software for calibration.	
3D	3D cannot be enabled simultaneously with Low Latency and Frame Multiplication. To use the 3D function, specified 3D glasses are needed. For details, please contact NovaStar technical support.	
HDR	Supports both automatic parsing and manual settings for HDR. When the input interfaces are HDMI 2.1, HDMI 2.0, and DP 1.4, HDR10 and HLG are supported. For 12G-SDI, DP 1.2, and non-standard HDR sources, HDR attributes can only be manually overridden.	
Low Latency	Low Latency cannot be enabled simultaneously with Genlock, 3D, and Frame Multiplication. Moreover, it is recommended to ensure all Ethernet ports load the cabinets vertically and share the same Y coordinate (all set to 0) when Low Latency is enabled.	

Table 4-2 Supported receiving card models

Receiving Card Model	Supported
1G receiving card	A10s Pro and its series
	A8s Pro and its series
	A8s and its series
	A8s-N
	A7s Plus
	A5s Plus
	B6s
5G receiving card	XA50 Pro
	CA50E

Appearance


Front Panel

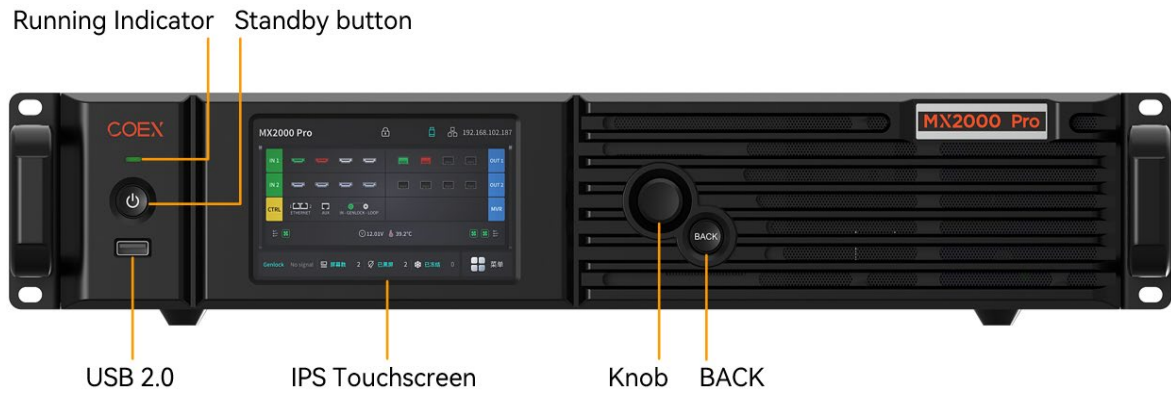

Name	Function
Running indicator	<ul style="list-style-type: none"> • Solid red: Standby. • Solid blue: The device is being powered on. • Solid green: The device is running normally. • Flashing red: The device is running abnormally.
Standby button	<ul style="list-style-type: none"> • Press the button to power on or power off the device. • Hold down the button for 5s to 10s to restart the device.

Name	Function
USB 2.0	<ul style="list-style-type: none"> Connect to a USB drive only to export the device diagnostic result. Only the NTFS and FAT32 file systems are supported. Others are not supported.
IPS touchscreen	A 5-inch screen that is for displaying the device status, settings, and sending commands.
Knob	<ul style="list-style-type: none"> On the home screen, press the knob to enter the main menu screen. On the main menu screen, rotate the knob to select a menu item or adjust the parameter value. Press the knob to confirm the operation. Hold down the knob and BACK button simultaneously for 5s or longer to lock or unlock the buttons and screen.
BACK	Go back to the previous menu or cancel the current operation.

Rear Panel

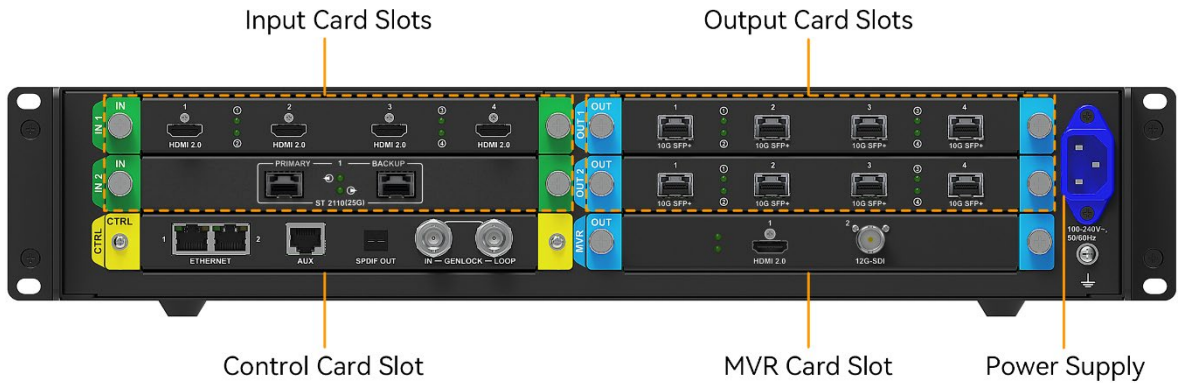

All product pictures shown in this document are for illustration purpose only. Actual product may vary.

Note

Markings on the rear panel card slot:

- The card slot marked with "IN x" only supports the installation of input cards, where x is the slot number. For example, IN 1 indicates the first input card slot.
- The card slot marked with "OUT x" only supports the installation of output cards, where x is the slot number. For example, OUT 2 indicates the second output card slot.
- The card slot marked with "MVR" only supports the installation of MVR output card.
- The card slot marked with "CTRL" only supports the installation of control cards.

Input Card			
MX_4×HDMI 2.0 input card			
Type	Qty	Description	
HDMI 2.0	4	Resolution	Max resolution: 4096×2160@60Hz or 8192×1080@60Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×1080@60Hz) Max height: 8192 pixels (1080×8192@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.
MX_2×HDMI 2.1 input card			
Type	Qty	Description	
HDMI 2.1	2	Resolution	Max resolution: 8192×4320@30Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@30Hz) Max height: 8192 pixels (4320×8192@30Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.

		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.

MX_4xDP 1.2 input card



Type	Qty	Description	
DP 1.2	4	Resolution	Max resolution: 4096×2160@60Hz or 8192×1080@60Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×1080@60Hz) Max height: 8192 pixels (1080×8192@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.

MX_2xDP 1.4 input card





Type	Qty	Description	
DP 1.4	2	Resolution	Max resolution: 7680×4320@30Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@25Hz) Max height: 8192 pixels (4320×8192@25Hz)

		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.



MX_1×DP 1.4 (8K@60Hz) input card



Type	Qty	Description	
DP 1.4 (8K)	1	Resolution	Max resolution: 7680×4320@60Hz Min resolution: 800×600@60Hz
		Max width/height	Max width: 7680 (7680×4320@60Hz) Max height: 7680 (4320×7680@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support preset resolutions up to 7680×4320@60Hz Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 8K 1.5m cable. Cables up to 3 meters are supported.

MX_4x12G-SDI input card			
			
Type	Qty	Description	
12G-SDI	4	Standards	Support ST-2082 (12G), ST-2081 (6G), ST-424 (3G) and ST-292 (HD) standard video inputs. Support 3G-Level A.
		Resolution	Max resolution: 4096x2160@60Hz Min resolution: 720x480i@59.94Hz
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60 Hz
		Interlaced signal inputs	Support interlaced signal inputs, including 1080i/576i/480i.
		Cables	Recommend using the CANARE-12G SDI coaxial cable. Cables up to 50 meters are supported.
MX_1xDP 1.4 + 1xHDMI 2.1 input card			
			
Type	Qty	Description	
DP 1.4	1	Resolution	Max resolution: 7680x4320@30Hz (Forced) Min resolution: 800x600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192x4320@25Hz) Max height: 8192 pixels (4320x8192@25Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840x2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.


HDMI 2.1	1	Resolution	Max resolution: 8192×4320@30Hz (Forced) Min resolution: 800×600@60Hz	
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@30Hz) Max height: 8192 pixels (4320×8192@30Hz)	
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 / 143.86/144/240 Hz	
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.	
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.	
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.	
		Interlaced signal inputs	Not supported.	
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.	
MX_1×ST 2110 (25G) input card				
Type	Qty	Description		
ST 2110 (25G)	1 primary, 1 backup	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.	
		Backup	Supports SMPTE 2022-7 standard.	
		Resolution	Max resolution: 4096×2160@60Hz/8192×1080@60Hz Min resolution: 800×600@60Hz	
		Max height & width	Max width: 8192 (8192×1080@60Hz) Max height: 8192 (1080×8192@60Hz)	
		Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/ 143.86/144/240 Hz	
		VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> Support preset resolutions up to 8192x1080@60Hz. Allow for custom input resolutions. 	
		NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.	

		PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
		FEC configuration	With parameters set at the card level, this feature can automatically detect and correct errors during data transmission, enhancing the reliability of video signal transfer. Supports RS-FEC and NO-FEC encoding methods. <div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> <p> Note</p> <p>This feature requires configuration on the switch before it can be used.</p> </div>
		IP address	IPv4 DHCP and static IP
		Multicast protocol	IGMPv3, IGMPv2
		Ethernet	<ul style="list-style-type: none"> • 25 GbE IEEE 802.3cc (25GBASE-LR) • 25 GbE IEEE 802.3by (25GBASE-SR)
		Optical transceiver	<p>The ST 2110 (25G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch.</p> <ul style="list-style-type: none"> • Supported transceiver types: SFP28 modules compliant with 25GBASE-LR/SR/CR. <ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (25G) card: Accelink 25GBASE-LR. – Modules expected to work but not yet extensively validated: Mellanox-SFP28-25G-SR, ARISTA-SFP28-25G-LR • Switches validated by NovaStar for use with the ST 2110 (25G) card: Mellanox SN2010, Arista DCS-7050SX3
		Cables	<p>OS1/OS2 optical fiber cables are recommended.</p> <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB
MX_2xST 2110 (25G) input card			
			
Type	Qty	Description	
ST 2110 (25G)	2 primaries, 2 backups	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.
		Backup	Supports SMPTE 2022-7 standard.
		Resolution	<p>Max resolution: 4096×2160@60Hz/8192×1080@60Hz</p> <p>Min resolution: 800×600@60Hz</p>

	Max height & width	Max width: 8192 (8192×1080@60Hz) Max height: 8192 (1080×8192@60Hz)
	Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/143.86/144/240 Hz
	VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> • Support preset resolutions up to 8192x1080@60Hz. • Allow for custom input resolutions.
	NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.
	PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
	IP address	IPv4 DHCP and static IP
	Multicast protocol	IGMPv3, IGMPv2
	Ethernet	<ul style="list-style-type: none"> • 25 GbE IEEE 802.3cc (25GBASE-LR) • 25 GbE IEEE 802.3by (25GBASE-SR)
	Optical transceiver	The ST 2110 (25G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch. <ul style="list-style-type: none"> • Supported transceiver types: SFP28 modules compliant with 25GBASE-LR/SR/CR. <ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (25G) card: Accelink 25GBASE-LR. – Modules expected to work but not yet extensively validated: Mellanox-SFP28-25G-SR, ARISTA-SFP28-25G-LR • Switches validated by NovaStar for use with the ST 2110 (25G) card: Mellanox SN2010, Arista DCS-7050SX3
	Cables	OS1/OS2 optical fiber cables are recommended. <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB

MX_1×ST 2110 (100G) input card



Type	Qty	Description	
ST 2110 (100G)	1 primary, 1 backup	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.
		Backup	Supports SMPTE 2022-7 standard.
		Resolution	<ul style="list-style-type: none"> • Max resolution: <ul style="list-style-type: none"> – 1x source: 8192×4320@60Hz – 4x sources: 4096×2160@60Hz • Min resolution: 800×600@60Hz
		Max height & width	Max width: 8192 (1x source: 8192×4320@60Hz, 4x sources: 8192×1080@60Hz) Max height: 8192 (1x source: 4320×8192@60Hz, 4x sources: 1080×8192@60Hz)
		Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/143.86/144/240 Hz
		VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> • Support preset resolutions up to 8192x4320@60Hz • Allow for custom input resolutions.
		NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.
		PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
		FEC configuration	With parameters set at the card level, this feature can automatically detect and correct errors during data transmission, enhancing the reliability of video signal transfer. Supports RS-FEC and NO-FEC encoding methods. <div style="background-color: #f0f0f0; padding: 5px; margin-top: 10px;">  Note This feature requires configuration on the switch before it can be used. </div>
		IP address	IPv4 DHCP and static IP
		Multicast protocol	IGMPv3, IGMPv2
		Ethernet	<ul style="list-style-type: none"> • 100 GbE IEEE 802.3ba (100GBASE-LR) • 100 GbE IEEE 802.3ba (100GBASE-SR) • 100 GbE IEEE 802.3ba (100GBASE-CR)
		Optical transceiver	The ST 2110 (100G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch. <ul style="list-style-type: none"> • Supported transceiver types: QSFP28 modules compliant with 100GBASE-LR4/SR4/CWDM4.

		<ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (100G) card: Accelink 100GBASE-LR4. – Modules expected to work but not yet extensively validated: Mellanox-QSFP-100G-SR4, ARISTA-QSFP-100G-LR4, ARISTA-QSFP-100G-SR4. • Switches validated by NovaStar for use with the ST 2110 (100G) card: Mellanox SN2010, Arista DCS-7050SX3
	Cables	<p>OS1/OS2 optical fiber cables are recommended.</p> <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB

Output Card



MX_4x10G_Fiber output card





Type	Qty	Description
10G SFP+	4	<p>10G optical ports with a 10.3125 Gbps transmission rate.</p> <ul style="list-style-type: none"> • Support single-mode and multi-mode optical fiber modules. The default configuration includes four 10G single-mode or multi-mode optical modules. For single-mode fiber, the maximum supported transmission distance is 10 km; for multi-mode fiber, the maximum supported transmission distance is 300 m. • A single optical port has the same load capacity of 10x 1G Ethernet ports, and a single card supports up to 40x Ethernet port outputs. • The maximum load of a single 1G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> – 8bit@60Hz: 659,722 pixels – 10bit@60Hz: 494,791 pixels (available only with the A10s Pro or A8s Pro receiving cards) – 10/12bit@60Hz: 329,861 pixels • Maximum output height/width of a single output card: 16,384 pixels. • Maximum load of a single output card: <ul style="list-style-type: none"> – 8/10bit@60Hz: 17,694,720 pixels – 12bit@60Hz: 13,194,440 pixels

MX_1x40G_Fiber output card

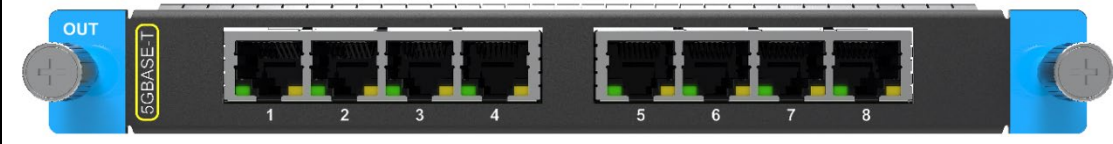

Type	Qty	Description
40G QSFP+	1	<p>40G optical port with a 41.25 Gbps transmission rate.</p> <ul style="list-style-type: none"> Support single-mode and multi-mode optical fiber modules. <p>The default configuration includes one 40G single-mode optical module.</p> <p>For single-mode fiber, the maximum supported transmission distance is 10 km; for multi-mode fiber, OM3 MMF supports a maximum distance of 100 m, and OM4 MMF supports a maximum distance of 150 m.</p> <ul style="list-style-type: none"> A single optical port has the same load capacity of 8x 5G Ethernet ports. The maximum load of a single 5G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> 8bit@60Hz: 2,951,200 pixels 10bit@60Hz: 2,291,312 pixels 12bit@60Hz: 1,475,600 pixels Maximum output height/width of a single output card: 16,384 pixels. Maximum load of a single output card: <ul style="list-style-type: none"> 8/10bit@60Hz: 17,694,720 pixels 12bit@60Hz: 11,804,800 pixels
MX_8x5G_Base-T		
		
Type	Qty	Description
5G Base-T	8	<ul style="list-style-type: none"> The maximum load of a single 5G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> 8bit@60Hz: 2,951,200 pixels 10bit@60Hz: 2,291,312 pixels 12bit@60Hz: 1,475,600 pixels Maximum output height/width of a single output card: 16,384 pixels. Maximum load of a single output card: <ul style="list-style-type: none"> 8/10bit@60Hz: 17,694,720 pixels 12bit@60Hz: 11,804,800 pixels
MVR output card		
		
Type	Qty	Description
HDMI 2.0	1	<ul style="list-style-type: none"> Resolution: 3840×2160@60Hz (default) and 1920×1080@60Hz Output color format: RGB 4:4:4, 8 bit Frame rate: 60 Hz

12G-SDI	1	<ul style="list-style-type: none"> Resolution: 3840×2160@60Hz (default) and 1920×1080@60Hz Output color format: YCbCr 4:2:2, 10 bit Frame rate: 60 Hz
Control Card		
		
Type	Qty	Description
ETHERNET	2	<p>Gigabit Ethernet control ports. Support TCP/IP protocol and star connection.</p> <p>They have the same functions without priority and order, and can be connected to VMP software and central control devices. No switch or router is needed to deploy multiple devices on the same LAN via device cascading as the network switching function is already built in. Up to 20 MX2000 Pro can be cascaded.</p>
GENLOCK	1	<p>A pair of Genlock signal connectors. Support Bi-Level, Tri-Level, and Blackburst.</p> <ul style="list-style-type: none"> IN: Accept the sync signal LOOP: Loop the sync signal <p>The Genlock input signal supports a frame rate range from 23.98 Hz to 60 Hz. For standard Genlock signal generators, up to 20 MX2000 Pro can be cascaded.</p>
AUX	1	An auxiliary connector for connecting to central control devices (RS232).
SPDIF	1	<p>Digital audio output connector allows for selecting one audio channel from the connected input sources for output.</p> <p> Note</p> <p>The following input cards do not support audio output: MX_1×DP 1.4 (8K@60Hz), MX_4×12G-SDI, MX_1×ST 2110 (25G), MX_2×ST 2110 (25G), and MX_1×ST 2110 (100G).</p>
Power		
Type	Qty	Description
100-240V~, 50/60Hz	1	AC power input connector and switch

Applications

Solution Build

Based on the installed output cards (4x10G fiber output card/1x40G fiber output card/8x5G Ethernet output card), users can build 1G/5G solutions with different models of fiber converters and receiving cards. 1G/5G refers to the output bandwidth of a single Ethernet port. For more detailed information, please refer to [Ethernet Port Load Capacity](#).


Table 6-1 COEX system build

Solution	Output Card	Fiber Converter	Receiving Card
1G Solution	4x10G fiber output card	CVT10, CVT10 Pro	1G receiving cards such as A10s Pro
5G Solution	1x40G fiber output card	CVT8-5G	5G receiving cards such as XA50 Pro

 Note


You can install different output cards on the same controller, but output cards with different Ethernet port bandwidths (1G/5G) cannot be used to load the same screen.

1G Solution (4x10G Fiber Output Card)

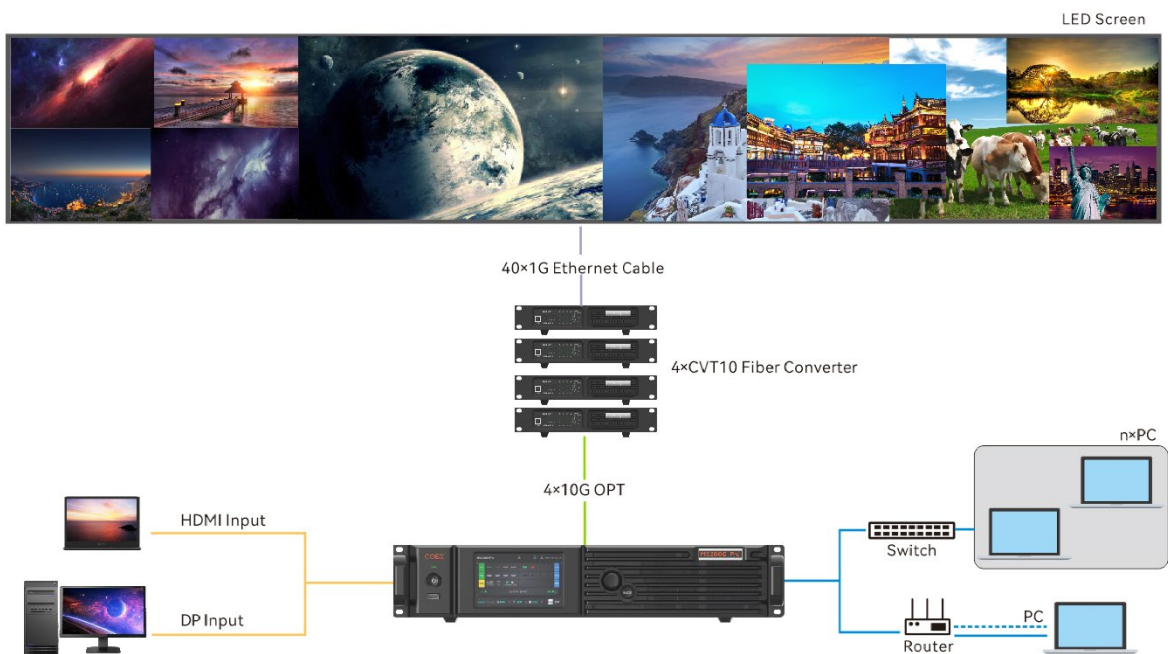


This diagram is an example of two input cards and one 4x10G fiber output card installed on an MX2000 Pro. The actual application may vary.

5G Solution (1x40G Fiber Output Card)

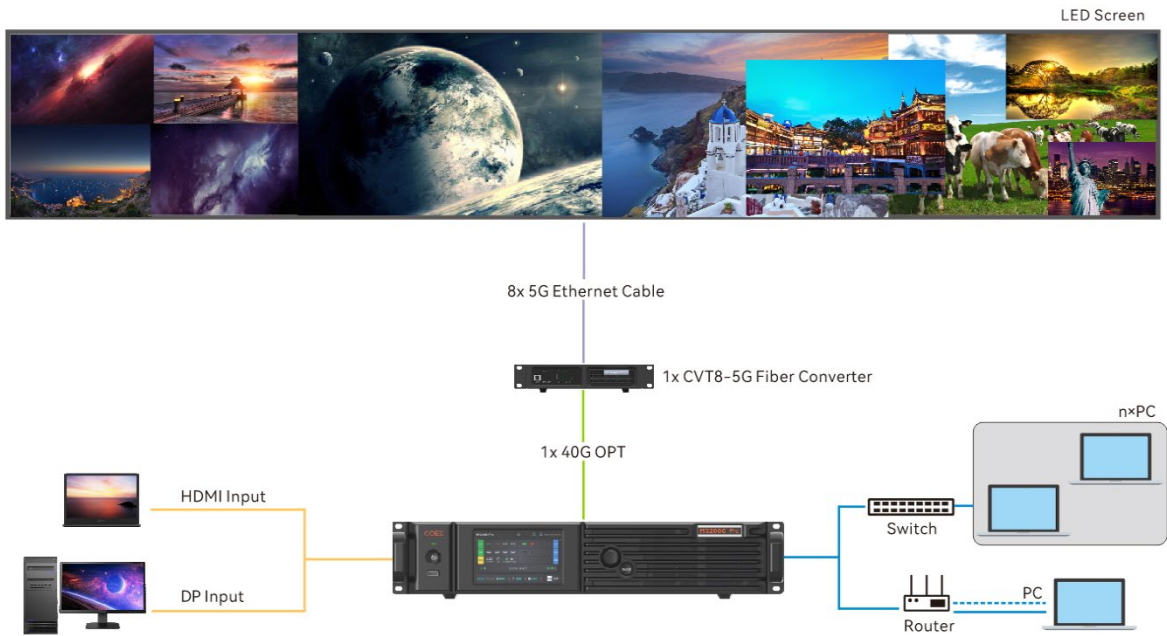



This diagram is an example of two input cards and one 1x40G fiber output card installed on an MX2000 Pro. The actual application may vary.

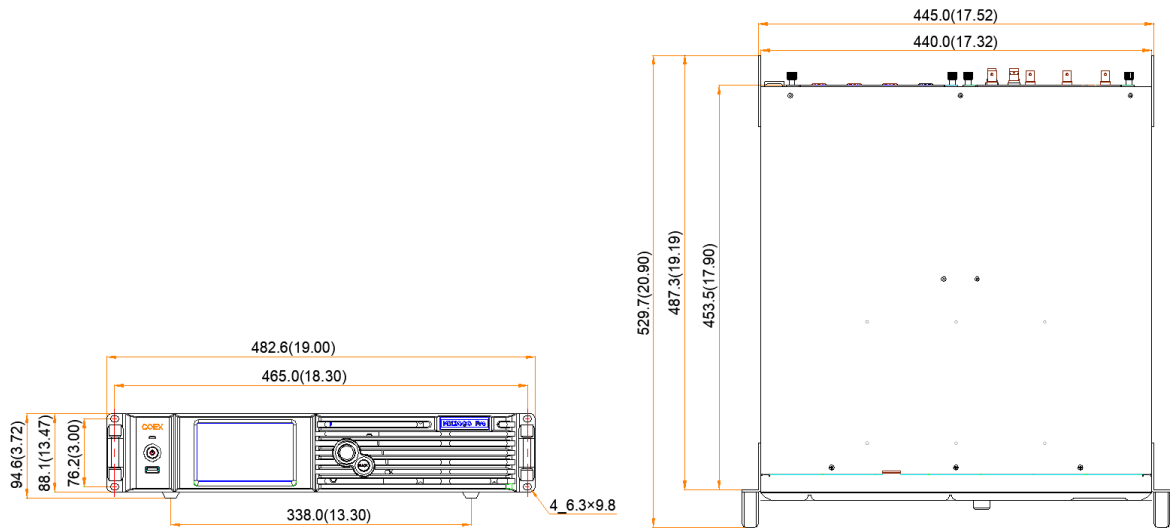Dimensions



Tolerance: ±0.5 Unit: mm

Product Specifications

Electrical Specifications	Power supply	100–240V~, 50/60Hz
	Max power consumption	260 W  Note As this product is a card-based controller, the stated power consumption represents the maximum for a fully configured unit. Actual consumption varies with the input/output cards installed. Please refer to the relevant card specifications for details.
Operating Environment	Temperature	–5°C to +45°C
	Humidity	0% RH to 80% RH, non-condensing
Storage Environment	Temperature	–30°C to +80°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 94.6 mm × 529.7 mm (foot pad included)
	Weight	<ul style="list-style-type: none"> • Net weight: 11.1 kg (chassis weight only) • Total weight: 12.0 kg (including the chassis, accessories, and packaging materials)  Note Since this product is a card-based controller, the weight provided in the specifications refers to the chassis only (excluding input and output cards). The actual total weight will depend on the cards used, and their weights can be found in their respective specifications.
Packing Information	Packing box	660.0 mm × 570.0 mm × 210.0 mm, kraft paper box
	Accessories	1x Power cord, 1x Ethernet cable, 1x HDMI 2.1 cable, 1x DP 1.4 cable 1x Quick Start Guide, 1x Customer Letter, 1x Safety Manual 1x Certificate of Approval
IP Rating		IP20 (Please prevent the product from water intrusion and do not wet or wash the product).
Noise Level (typical at 25°C/77°F)		41.5 dB (A)

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

Video Source Specifications

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
HDMI 2.0	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	12bit	24/25/30	
					10bit	24/25/30/48/50	
			8bit	24/25/30/48/50/60			
			YCbCr		4:2:2	8/10/12bit	
		4:2:0	8/10/12bit	30/48/50/60			
		3840×2160	RGB / YCbCr	4:4:4	12bit	24/25/30	
					10bit	24/25/30/48/50	
			8bit	24/25/30/48/50/60			
	YCbCr		4:2:2		8/10/12bit		
	4:2:0	8/10/12bit	48/50/60				
	2K1K	2560×1440	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75	
					10bit	24/25/30/48/50/60/75/100	
					8bit	24/25/30/48/50/60/75/100/120	
			YCbCr	4:2:2	8/10/12bit		
			4:2:0	8/10/12bit	75/100/120		
			1920×1080	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/72/75/100/120/144
10bit							
8bit		24/25/30/48/50/60/72/75/100/120/144/240					
YCbCr				4:2:2	8/10/12bit		
4:2:0				8/10/12bit	120/144/240		
HDMI 2.1		8K		8192×4320 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit
			YCbCr		4:2:2	8/10/12bit	
	4:2:0		8/10/12bit				
	7680×4320		RGB / YCbCr	4:4:4	8/10/12bit	24/25/30	

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
		(Forced)	YCbCr	4:2:2	8/10/12bit		
				4:2:0	8/10/12bit		
	5K	5120×2880 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75	
				YCbCr	4:2:2		8/10/12bit
			YCbCr	4:2:0	8/10/12bit		
				4:2:0	8/10/12bit		
	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120	
				YCbCr	4:2:2		8/10/12bit
			YCbCr	4:2:0	8/10/12bit	30/48/50/60/75/100/120	
				4:2:0	8/10/12bit		
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120 (75 Hz and above need to be forced)	
				YCbCr	4:2:2		8/10/12bit
	YCbCr	4:2:0	8/10/12bit	48/50/60/75/100/120			
		4:2:0	8/10/12bit				
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240 (144 Hz and above need to be forced)	
				YCbCr	4:2:2		8/10/12bit
YCbCr			4:2:0	8/10/12bit	75/100/120/144/240		
			4:2:0	8/10/12bit			
1920×1080		RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240 (240 Hz needs to be forced)		
			YCbCr	4:2:2		8/10/12bit	
YCbCr	4:2:0	8/10/12bit	120				
DP 1.2	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50	
				YCbCr	4:4:4	10bit	24/25/30/48/50/60
					4:4:4	8bit	24/25/30/48/50/60/75
			4:2:2		8/10/12bit	24/25/30/48/50/60/75 (75 Hz needs to be forced)	
			RGB / YCbCr	4:4:4	12bit		24/25/30/48/50
				YCbCr	4:4:4		10bit
	4:4:4	8bit			24/25/30/48/50/60/75		
	2K1K	2560×1440	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100	
				4:4:4	10bit	24/25/30/48/50/60/75/100/120	

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
		1920×1080			8bit	24/25/30/48/50/60/75/100/120/144 (144 Hz needs to be forced)	
			YCbCr	4:2:2	8/10/12bit		
			RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144 (144 Hz needs to be forced)	
					10bit		
					8bit		24/25/30/48/50/60/75/100/120/144/240 (240 Hz needs to be forced)
YCbCr	4:2:2	8/10/12bit					
DP 1.4	8K	8192×4320 (Forced)	RGB / YCbCr	4:4:4	12bit	Not supported	
					10bit		
					8bit	24/25	
					YCbCr		4:2:2
				4:2:0	8/10/12bit		
			7680×4320 (Forced)	RGB / YCbCr	4:4:4	12bit	Not supported
						10bit	24
						8bit	24/25/30
	YCbCr	4:2:2				8/10/12bit	
		4:2:0	8/10/12bit				
	5K	5120×2880 (Forced)	RGB / YCbCr	4:4:4	12bit	24/25/30	
					10bit	24/25/30/48/50	
					8bit	24/25/30/48/50/60	
					YCbCr		4:2:2
				4:2:0	8/10/12bit		
			4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	12bit
10bit							24/25/30/48/50/60/75
8bit							24/25/30/48/50/60/75/100
YCbCr	4:2:2	8/10/12bit					
	4:2:0	8/10/12bit			30/48/50/60		
3840×2160	RGB / YCbCr	4:4:4			12bit	24/25/30/48/50/60	
					10bit	24/25/30/48/50/60/75 (75 Hz needs to be forced)	
					8bit	24/25/30/48/50/60/75/100/120 (75 Hz and above need to be forced)	
			YCbCr	4:2:2	12bit		

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)
					8/10bit	
				4:2:0	8/10/12bit	48/50/60
	2K1K	2560×1440	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144 (144Hz needs to be forced)
					10bit	
					8bit	
			YCbCr	4:2:2	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240 (144Hz and above need to be forced)
	4:2:0	8/10/12bit	75/100/120			
	1920×1080	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144/240 (240Hz needs to be forced)	
				10bit		
				8bit		
YCbCr			4:2:2	8/10/12bit		
			4:2:0	8/10/12bit	120/144	
DP 1.4 (8K)	8K	7680×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60
			YCbCr	4:2:2	8/10/12bit	
				4:2:0	8/10/12bit	
	5K	5120×2880	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120
			YCbCr	4:2:2	8/10/12bit	
				4:2:0	8/10/12bit	
	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144
			YCbCr	4:2:2	8/10/12bit	
				4:2:0	8/10/12bit	
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240
			YCbCr	4:2:2	8/10/12bit	
				4:2:0	8/10/12bit	
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240
			YCbCr	4:2:2	8/10/12bit	
				4:2:0	8/10/12bit	

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
		1920×1080	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240	
			YCbCr	4:2:2	8/10/12bit		
				4:2:0	8/10/12bit		
12G-SDI	4K	4096×2160	YCbCr	4:2:2	10bit	24/25/30/48/50/60	
		3840×2160					
	2K1K	2048×1080					
		1920×1080					
ST 2110 (25G)	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	
			YCbCr	4:2:2			
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60
			YCbCr	4:2:2			
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144	
			YCbCr	4:2:2			
		1920×1080	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60/100/120/144/240
			YCbCr	4:2:2			
	720P	1280×720	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		800×600	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60/100/120/144/240
			YCbCr	4:2:2			
ST 2110 (100G) - 1x source	8K	8192×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	
			YCbCr	4:2:2			
		7680×4320	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60
			YCbCr	4:2:2			
	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
			YCbCr	4:2:2			
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		1920×1080	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
	YCbCr		4:2:2				
	ST 2110 (100G) - 4 sources	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60
				YCbCr	4:2:2		
			3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60
		YCbCr		4:2:2			
		2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144
YCbCr				4:2:2			
1920×1080			RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
		YCbCr	4:2:2				
720P		1280×720	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		800×600	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
YCbCr			4:2:2				

Note

- The table above only displays a selection of common resolutions and integer frame rates. Decimal frame rates are also supported, allowing for automatic frame rate adaptation from the highest frame rate of each resolution down to 23.98/29.97/47.95/59.94/71.93/119.88/143.86Hz. The ST 2110 input interface can support a 95.50 Hz frame rate but does not support 71.93 Hz.

- When using YCbCr 4:2:0 input, all frame rates need to be forced. Standard graphics cards only support a 4K resolution at 50/60 Hz. Other resolutions and frame rates require a source device that supports this color space and sampling to be forced.

Ethernet Port Load Capacity

1G Solution (4x10G Fiber Output Card)

When working with the A10s Pro/A8s Pro and their derivative receiving cards, the formula of calculating the load capacity per Ethernet port and the detailed parameters are as follows. When working with other Armor series receiving cards, custom receiving card firmware is required to support 10/12-bit depth.


- 8bit: Load capacity $\times 24 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$
- 10bit: Load capacity $\times 32 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$
- 12bit: Load capacity $\times 48 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
24 Hz	1,649,306	1,236,979	824,653
25 Hz	1,583,333	1,187,500	791,667
30 Hz	1,319,444	989,583	659,722
50 Hz	791,667	593,750	395,833
60 Hz	659,722	494,792	329,861
120 Hz	329,861	247,396	164,931
144 Hz	274,884	206,163	137,442
240 Hz	164,931	123,698	82,465
300 Hz	131,944	95,958	65,972
360 Hz	109,954	82,465	54,977
480 Hz	82,465	61,849	41,232

Note

To achieve the maximum load capacity, the width of each rectangular load area within a single Ethernet port must be at least 128 pixels. If the width of a rectangular load area within the

Ethernet port is less than 128, the loss in capacity is calculated as (128 – width of the rectangular load area) × height of the rectangular load area. The total load capacity loss for the Ethernet port is the sum of the losses for all rectangular load areas within the port.

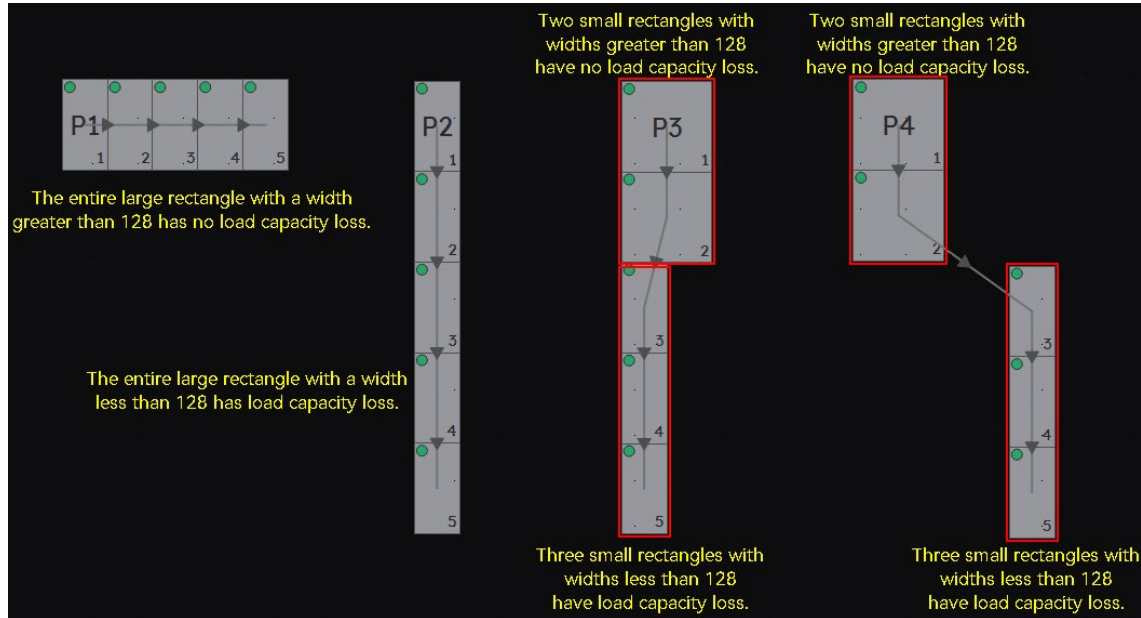

5G Solution (1x40G Fiber Output Card)

When working with the XA50 Pro and CA50E receiving cards, the formula of calculating the load capacity per Ethernet port and the detailed parameters are as follows:


- 8bit: Load capacity × 24 × Frame rate < 5G × 0.85
- 10bit: Load capacity × 32 × Frame rate < 5G × 0.88
- 12bit: Load capacity × 48 × Frame rate < 5G × 0.85

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
24 Hz	7,378,000	5,728,280	3,689,000
25 Hz	7,082,800	5,499,149	3,541,440
30 Hz	5,902,400	4,582,624	2,951,200
50 Hz	3,541,440	2,749,574	1,770,720
60 Hz	2,951,200	2,291,312	1,475,600
120 Hz	1,475,600	1,145,656	737,800
144 Hz	1,229,600	954,713	612,374

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
240 Hz	737,800	572,828	368,900
300 Hz	590,240	458,262	295,120
360 Hz	491,800	381,885	245,900
480 Hz	368,900	286,414	184,450

 Note

To achieve the maximum load capacity, the width of each rectangular load area within a single Ethernet port must be at least 128 pixels. If the width of a rectangular load area within the Ethernet port is less than 128, the loss in capacity is calculated as (128 - width of the rectangular load area) × height of the rectangular load area. The total load capacity loss for the Ethernet port is the sum of the losses for all rectangular load areas within the port.

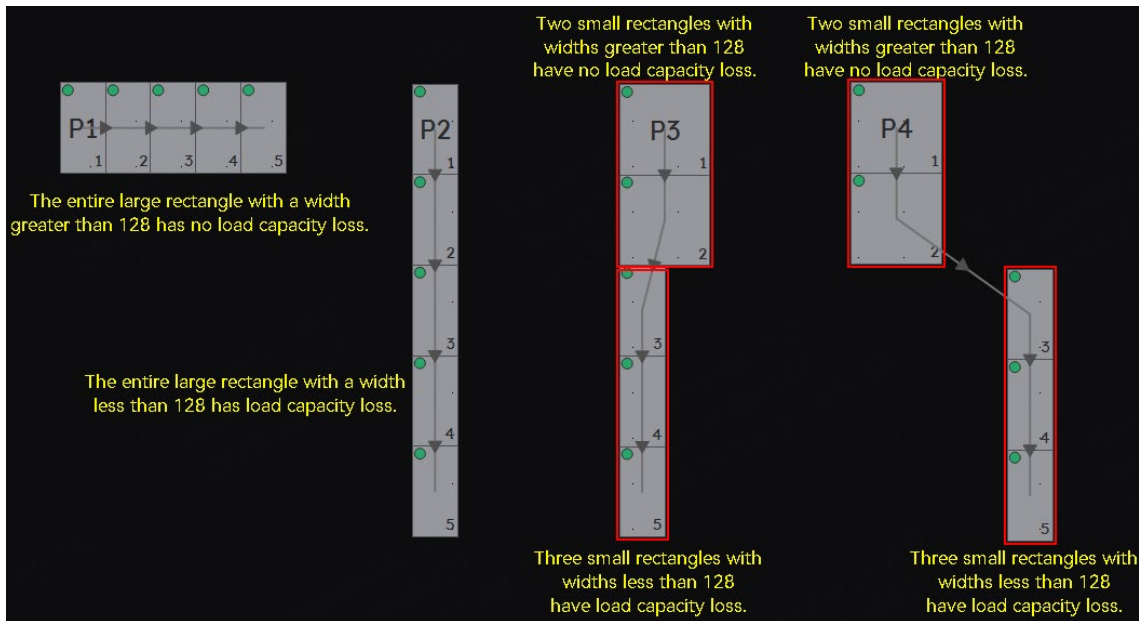

Notes and Cautions

Notes for Battery

- The battery is not intended to be replaced.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery can result in an explosion.

- Leaving a battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas.

Notes for Installation

The product can be mounted in a standard 19-inch rack capable of withstanding at least four times the total weight of the mounted equipment. Eight M5 screws are required to fix the product.

- Elevated Operating Ambient – If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
- Reduced Air Flow – Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- Mechanical Loading – Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- Circuit Overloading – Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- Reliable Earthing – Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).

FCC Caution

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency

energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Others

- This product can only be placed horizontally. Do not mount vertically or upside-down.
- This is Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

Copyright

Copyright © 2026 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| Official website
| www.novastar.tech

| Technical support
| support@novastar.tech