

MX6000 Pro

LED Display Controller



User Manual

Change History

Document Version	Release Date	Description
V1.5.1	2026-04-30	<ul style="list-style-type: none">• Added the MX_8×5G_Base-T output card and MX_1×HDMI 2.0+1×12G-SDI MVR output card.• Updated the rear panel diagram.• Updated fiber optic transmission distances.• Added the noise level.• Updated the load capacity loss description.
V1.5.0	2025-09-30	<ul style="list-style-type: none">• Added MX_1×ST 2110 (100G) and MX_1×DP 1.4 (8K@60Hz) input cards.• HDMI 2.0 input supports YCbCr 4:2:0 color sampling format.• Supports Art-Net protocol control, central control protocol, and viewing of device MAC address.• Supports SPDIF audio output.
V1.4.0	2024-06-13	<ul style="list-style-type: none">• Added MX_1×ST 2110 (25G), MX_2×ST 2110 (25G), MX_1×DP 1.4 + 1×HDMI 2.1 input cards, and MX_1×40G_Fiber output card.
V1.1.0	2023-09-28	Added MX_2×HDMI 2.1 and MX_4×12G-SDI input cards
V1.0.0	2023-08-03	First release

Contents

Change History	1
Contents	2
1 Introduction	4
2 Appearance	5
2.1 Front Panel	5
2.2 Rear Panel	6
3 Applications	18
3.1 Solution Build	18
3.2 1G Solution (4x10G Fiber Output Card)	19
3.3 5G Solution (1x40G Fiber Output Card)	20
4 Front Screen Panel	21
4.1 UI Introduction	21
4.1.1 Home Screen	21
4.1.2 Main Menu	23
4.2 Screen	24
4.2.1 Set Brightness, Color Temperature and Gamma	24
4.2.2 Set Screen Status	25
4.3 Input	26
4.3.1 Set Internal Source	26
4.3.2 Check Input Source Information	27
4.3.3 Set EDID	27
4.3.4 Set HDR	28
4.4 Communication	29
4.4.1 Network	29
4.4.2 MAC Address	30
4.4.3 Protocol	30
4.5 Settings	31
4.5.1 Configure LCD Screen	31
4.5.2 Setting Language	32
4.5.3 Set Temperature Scale	33

4.5.4 Check Firmware Information	33
4.5.5 Factory Reset	34
4.6 Maintenance	34
4.6.1 Diagnostics	34
4.6.2 View and Export Logs.....	35
4.6.3 Check Device Status.....	36
5 VMP Operations	37
6 Specifications	38
7 Video Source Specifications.....	40
8 Ethernet Port Load Capacity	47
8.1 1G Solution (4x10G Fiber Output Card)	47
8.2 5G Solution (1x40G Fiber Output Card)	48
9 Copyright	50

1 Introduction

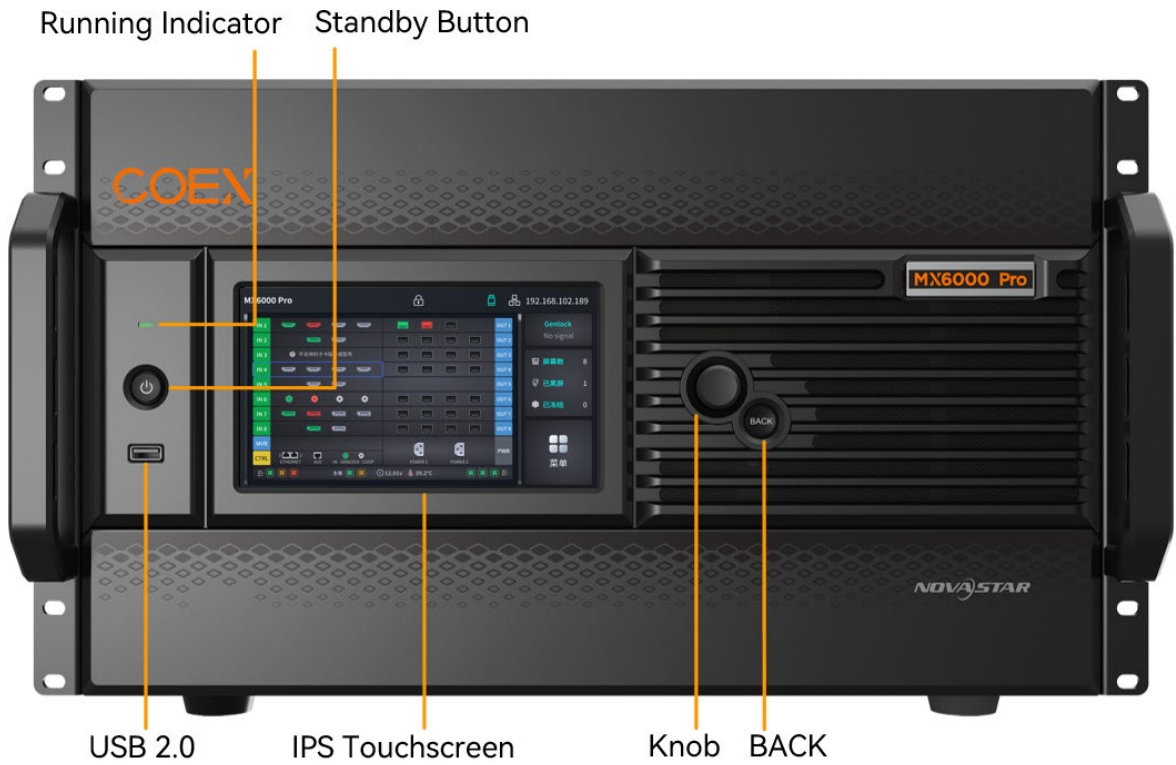
The MX6000 Pro is a large professional 8K LED display controller from Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar), designed as part of the COEX control system series. Its remarkable features include 12-bit color depth, 480 Hz capability, real-time multi-screen scaling, 0-frame latency, and HDR supportability, providing precise brightness control, true-to-life color fidelity, and an excellent image quality. Its card-based modular design is specifically tailored for future LED displays, allowing for flexible input and output card configurations that are stable and easy to maintain. With a compact 6U size, it supports up to 32x 4K@60Hz, 16x 8K@30Hz, or 8x 8K@60Hz video inputs, with a maximum load capacity of 141 million pixels, making it ideal for large-screen configurations.

The MX6000 Pro offers a wide range of options with up to 10 different input cards supporting 8K, 4K, and VoIP. For output, it supports 2 types of output cards: 4x 10G fiber, 1x 40G fiber. These cards can be configured flexibly to accommodate either 1G or 5G bandwidth for the control system, catering to different requirements. Additionally, it supports seamless backup and automatic switching between devices, cards, and Ethernet ports. In case of any malfunction, it promptly switches over while issuing automatic alerts, ensuring stable output on-site. To further enhance the user experience, it is complemented by the advanced control software, VMP, enabling users to have better control and management capabilities.

The MX6000 Pro offers many advantages such as highly integrated design, premium image quality, powerful performance, tremendous load capacity, and easy control. It is widely used in rental services for large events, xR/VP studios, large fixed installation applications, TV production, e-sports events, exhibition halls, and other application scenarios.

2 Appearance


2.1 Front Panel



Name	Function
Running indicator	<ul style="list-style-type: none"> • Solid red: Standby. • Solid blue: The device is being powered on. • Solid green: The device is running normally. • Flashing red: The device is running abnormally.
Standby button	<ul style="list-style-type: none"> • Press the button to power on or power off the device. • Hold down the button for 5s to 10s to restart the device.
USB 2.0	<ul style="list-style-type: none"> • Connect to a USB drive only to export the device diagnostic result. • Only the NTFS and FAT32 file systems are supported. Others are not supported.
IPS touchscreen	A 7-inch screen that is for displaying the device status, settings, and sending commands.
Knob	<ul style="list-style-type: none"> • On the home screen, press the knob to enter the main menu screen. • On the main menu screen, rotate the knob to select a menu item or adjust the parameter value. Press the knob to confirm the operation.

Name	Function
	<ul style="list-style-type: none"> Hold down the knob and BACK button simultaneously for 5s or longer to lock or unlock the buttons and screen.
BACK	Go back to the previous menu or cancel the current operation.

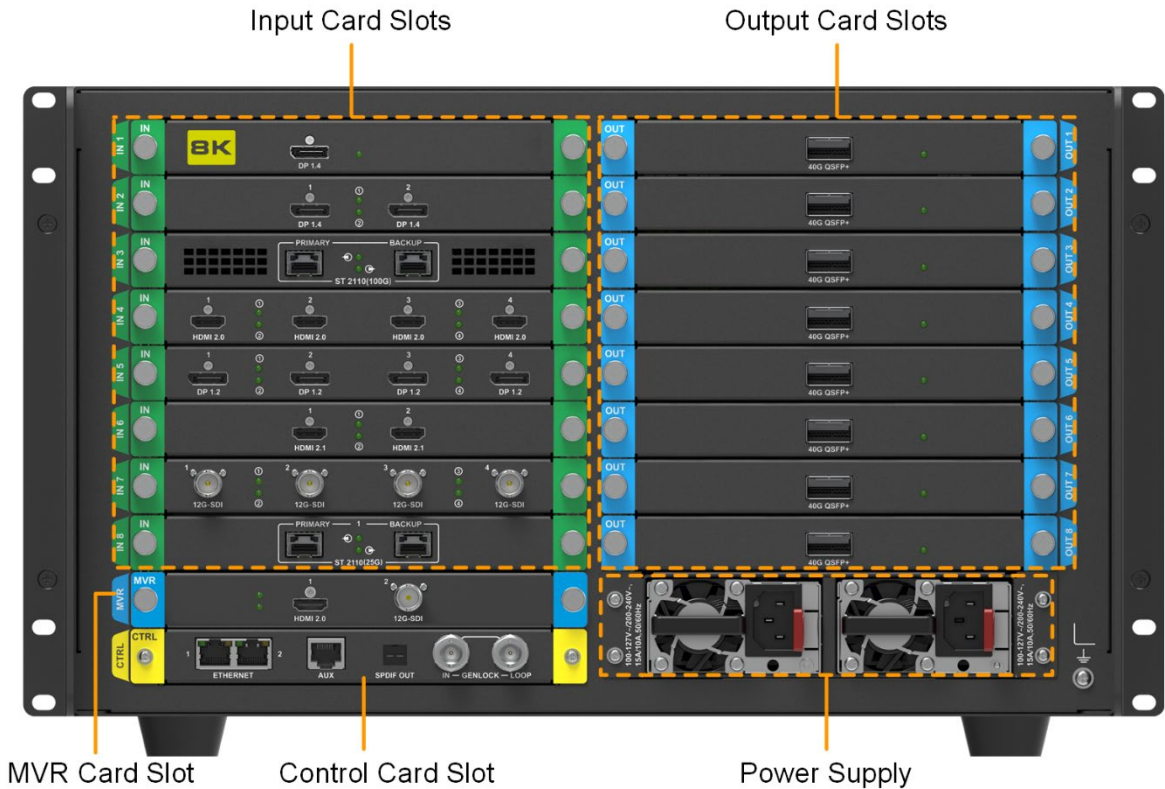2.2 Rear Panel





All product pictures shown in this document are for illustration purpose only. Actual product may vary.

Note

Markings on the rear panel card slot:

- The card slot marked with "IN x" only supports the installation of input cards, where x is the slot number. For example, IN 1 indicates the first input card slot.
- The card slot marked with "OUT x" only supports the installation of output cards, where x is the slot number. For example, OUT 2 indicates the second output card slot.
- The card slot marked with "MVR" only supports the installation of MVR output card.
- The card slot marked with "CTRL" only supports the installation of control cards.

Input Card			
MX_4×HDMI 2.0 input card			
			
Type	Qty	Description	
HDMI 2.0	4	Resolution	Max resolution: 4096×2160@60Hz or 8192×1080@60Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×1080@60Hz) Max height: 8192 pixels (1080×8192@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 /143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.
MX_2×HDMI 2.1 input card			
			
Type	Qty	Description	
HDMI 2.1	2	Resolution	Max resolution: 8192×4320@30Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@30Hz) Max height: 8192 pixels (4320×8192@30Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 /143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.

		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.

MX_4xDP 1.2 input card




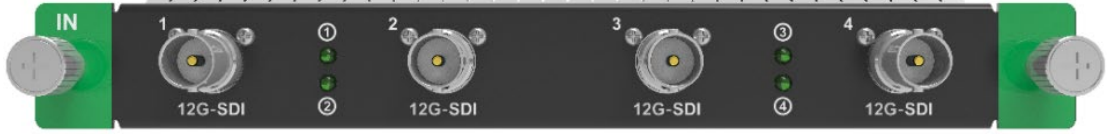

Type	Qty	Description	
DP 1.2	4	Resolution	Max resolution: 4096×2160@60Hz or 8192×1080@60Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×1080@60Hz) Max height: 8192 pixels (1080×8192@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 /143.86/144/240 Hz
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.

MX_2×DP 1.4 input card




Type	Qty	Description	
DP 1.4	2	Resolution	Max resolution: 7680×4320@30Hz (Forced) Min resolution: 800×600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@25Hz) Max height: 8192 pixels (4320×8192@25Hz)

		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120/143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.
MX_1×DP 1.4 (8K@60Hz) input card			
			
Type	Qty	Description	
DP 1.4 (8K)	1	Resolution	Max resolution: 7680×4320@60Hz Min resolution: 800×600@60Hz
		Max width/height	Max width: 7680 (7680×4320@60Hz) Max height: 7680 (4320×7680@60Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120/143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support preset resolutions up to 7680×4320@60Hz Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 8K 1.5m cable. Cables up to 3 meters are supported.

MX_4x12G-SDI input card			
			
Type	Qty	Description	
12G-SDI	4	Standards	Support ST-2082 (12G), ST-2081 (6G), ST-424 (3G) and ST-292 (HD) standard video inputs. Support 3G-Level A.
		Resolution	Max resolution: 4096x2160@60Hz Min resolution: 720x480i@59.94Hz
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60 Hz
		Interlaced signal inputs	Support interlaced signal inputs, including 1080i/576i/480i.
		Cables	Recommend using the CANARE-12G SDI coaxial cable. Cables up to 50 meters are supported.
MX_1xDP 1.4 + 1xHDMI 2.1 input card			
			
Type	Qty	Description	
DP 1.4	1	Resolution	Max resolution: 7680x4320@30Hz (Forced) Min resolution: 800x600@60Hz
		Max width/height (Forced)	Max width: 8192 pixels (8192x4320@25Hz) Max height: 8192 pixels (4320x8192@25Hz)
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 /143.86/144/240 Hz
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.
		EDID management	Support standard resolutions, up to 3840x2160@60Hz. Support custom input resolutions.
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.
		Interlaced signal inputs	Not supported.
		Cables	Recommend using the UGREEN DP 1.4 cable. Cables up to 5 meters are supported.

HDMI 2.1	1	Resolution	Max resolution: 8192×4320@30Hz (Forced) Min resolution: 800×600@60Hz	
		Max width/height (Forced)	Max width: 8192 pixels (8192×4320@30Hz) Max height: 8192 pixels (4320×8192@30Hz)	
		Frame rates	23.98/24/25/29.97/30/47.95/48/50/59.94/60/71.93/72/75/100/119.88/120 /143.86/144/240 Hz	
		HDR	Support HDR10 and comply with the SMPTE ST 2084 and SMPTE ST 2086 standards. Support HLG.	
		EDID management	Support standard resolutions, up to 3840×2160@60Hz. Support custom input resolutions.	
		HDCP	HDCP 2.3 compliant, backwards compatible with HDCP 2.2/HDCP 1.4/HDCP 1.3.	
		Interlaced signal inputs	Not supported.	
		Cables	Recommend using the UGREEN HDMI 2.1 cable. Cables up to 5 meters are supported.	
MX_1×ST 2110 (25G) input card				
Type	Qty	Description		
ST 2110 (25G)	1 primary, 1 backup	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.	
		Backup	Supports SMPTE 2022-7 standard.	
		Resolution	Max resolution: 4096×2160@60Hz/8192×1080@60Hz Min resolution: 800×600@60Hz	
		Max height & width	Max width: 8192 (8192×1080@60Hz) Max height: 8192 (1080×8192@60Hz)	
		Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/ 143.86/144/240 Hz	
		VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> • Support preset resolutions up to 8192x1080@60Hz. • Allow for custom input resolutions. 	
		NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.	

		PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
		FEC configuration	With parameters set at the card level, this feature can automatically detect and correct errors during data transmission, enhancing the reliability of video signal transfer. Supports RS-FEC and NO-FEC encoding methods. <div style="background-color: #f0f0f0; padding: 5px;"> <p> Note</p> <p>This feature requires configuration on the switch before it can be used.</p> </div>
		IP address	IPv4 DHCP and static IP
		Multicast protocol	IGMPv3, IGMPv2
		Ethernet	<ul style="list-style-type: none"> • 25 GbE IEEE 802.3cc (25GBASE-LR) • 25 GbE IEEE 802.3by (25GBASE-SR)
		Optical transceiver	<p>The ST 2110 (25G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch.</p> <ul style="list-style-type: none"> • Supported transceiver types: SFP28 modules compliant with 25GBASE-LR/SR/CR. <ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (25G) card: Accelink 25GBASE-LR. – Modules expected to work but not yet extensively validated: Mellanox-SFP28-25G-SR, ARISTA-SFP28-25G-LR • Switches validated by NovaStar for use with the ST 2110 (25G) card: Mellanox SN2010, Arista DCS-7050SX3
		Cables	<p>OS1/OS2 optical fiber cables are recommended.</p> <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB

MX_2xST 2110 (25G) input card



Type	Qty	Description	
ST 2110 (25G)	2 primaries, 2 backups	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.
		Backup	Supports SMPTE 2022-7 standard.
		Resolution	<p>Max resolution: 4096×2160@60Hz/8192×1080@60Hz</p> <p>Min resolution: 800×600@60Hz</p>

		Max height & width	Max width: 8192 (8192×1080@60Hz) Max height: 8192 (1080×8192@60Hz)
		Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/143.86/144/240 Hz
		VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> • Support preset resolutions up to 8192x1080@60Hz. • Allow for custom input resolutions.
		NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.
		PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
		IP address	IPv4 DHCP and static IP
		Multicast protocol	IGMPv3, IGMPv2
		Ethernet	<ul style="list-style-type: none"> • 25 GbE IEEE 802.3cc (25GBASE-LR) • 25 GbE IEEE 802.3by (25GBASE-SR)
		Optical transceiver	<p>The ST 2110 (25G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch.</p> <ul style="list-style-type: none"> • Supported transceiver types: SFP28 modules compliant with 25GBASE-LR/SR/CR. <ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (25G) card: Accelink 25GBASE-LR. – Modules expected to work but not yet extensively validated: Mellanox-SFP28-25G-SR, ARISTA-SFP28-25G-LR • Switches validated by NovaStar for use with the ST 2110 (25G) card: Mellanox SN2010, Arista DCS-7050SX3
		Cables	<p>OS1/OS2 optical fiber cables are recommended.</p> <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB

MX_1×ST 2110 (100G) input card



Type	Qty	Description	
ST 2110 (100G)	1 primary, 1 backup	Standard	Supports SMPTE ST 2110 (-10, 20) and SMPTE 2059 (-1, -2) standards.
		Backup	Supports SMPTE 2022-7 standard.
		Resolution	<ul style="list-style-type: none"> • Max resolution: <ul style="list-style-type: none"> – 1x source: 8192×4320@60Hz – 4x sources: 4096×2160@60Hz • Min resolution: 800×600@60Hz
		Max height & width	Max width: 8192 (1x source: 8192×4320@60Hz, 4x sources: 8192×1080@60Hz) Max height: 8192 (1x source: 4320×8192@60Hz, 4x sources: 1080×8192@60Hz)
		Frame rate	23.98/24/25/29.97/30/47.95/48/50/59.94/60/95.90/100/119.88/120/143.86/144/240 Hz
		VMP control	Support loading video stream configuration by SDP file or directly inputting. Exporting SDP file is also supported. Support setting the resolution when managing ST 2110 source in VMP. <ul style="list-style-type: none"> • Support preset resolutions up to 8192x4320@60Hz • Allow for custom input resolutions.
		NMOS management	NMOS registration, discovery, control, and global parameter configuration based on IS-04, IS-05, and IS-09 standards. Supports three registration methods: mDNS, DNS-SD, and Static.
		PTP settings	Supports the IEEE 1588-2008 standard, enabling high-precision synchronization across different input sources when Lock Input to PTP is activated.
		FEC configuration	With parameters set at the card level, this feature can automatically detect and correct errors during data transmission, enhancing the reliability of video signal transfer. Supports RS-FEC and NO-FEC encoding methods. <div style="background-color: #f0f0f0; padding: 5px; margin-top: 10px;"> Note This feature requires configuration on the switch before it can be used. </div>
		IP address	IPv4 DHCP and static IP
		Multicast protocol	IGMPv3, IGMPv2
		Ethernet	<ul style="list-style-type: none"> • 100 GbE IEEE 802.3ba (100GBASE-LR) • 100 GbE IEEE 802.3ba (100GBASE-SR) • 100 GbE IEEE 802.3ba (100GBASE-CR)
Optical transceiver	The ST 2110 (100G) card does not come with an optical transceiver by default. Please purchase one separately. We recommend using transceivers from the same vendor as your switch. <ul style="list-style-type: none"> • Supported transceiver types: QSFP28 modules compliant with 100GBASE-LR4/SR4/CWDM4. 		

		<ul style="list-style-type: none"> – Modules validated by NovaStar for use with the ST 2110 (100G) card: Accelink 100GBASE-LR4. – Modules expected to work but not yet extensively validated: Mellanox-QSFP-100G-SR4, ARISTA-QSFP-100G-LR4, ARISTA-QSFP-100G-SR4. • Switches validated by NovaStar for use with the ST 2110 (100G) card: Mellanox SN2010, Arista DCS-7050SX3
	Cables	<p>OS1/OS2 optical fiber cables are recommended.</p> <ul style="list-style-type: none"> • Transmission mode: single-mode duplex • Diameter: 9/125µm • Interface type: LC • Insertion loss: ≤0.3 dB • Return loss: ≥45 dB

Output Card



MX_4×10G_Fiber output card





Type	Qty	Description
10G SFP+	4	<p>10G optical ports with a 10.3125 Gbps transmission rate.</p> <ul style="list-style-type: none"> • Support single-mode and multi-mode optical fiber modules. The default configuration includes four 10G single-mode or multi-mode optical modules. For single-mode fiber, the maximum supported transmission distance is 10 km; for multi-mode fiber, the maximum supported transmission distance is 300 m. • A single optical port has the same load capacity of 10x 1G Ethernet ports, and a single card supports up to 40x Ethernet port outputs. • The maximum load of a single 1G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> – 8bit@60Hz: 659,722 pixels – 10bit@60Hz: 494,791 pixels (available only with the A10s Pro or A8s Pro receiving cards) – 10/12bit@60Hz: 329,861 pixels • Maximum output height/width of a single output card: 16,384 pixels. • Maximum load of a single output card: <ul style="list-style-type: none"> – 8/10bit@60Hz: 17,694,720 pixels – 12bit@60Hz: 13,194,440 pixels

MX_1×40G_Fiber output card



Type	Qty	Description
40G QSFP+	1	<p>40G optical port with a 41.25 Gbps transmission rate.</p> <ul style="list-style-type: none"> Support single-mode and multi-mode optical fiber modules. <p>The default configuration includes one 40G single-mode optical module.</p> <p>For single-mode fiber, the maximum supported transmission distance is 10 km; for multi-mode fiber, OM3 MMF supports a maximum distance of 100 m, and OM4 MMF supports a maximum distance of 150 m.</p> <ul style="list-style-type: none"> A single optical port has the same load capacity of 8x 5G Ethernet ports. The maximum load of a single 5G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> 8bit@60Hz: 2,951,200 pixels 10bit@60Hz: 2,291,312 pixels 12bit@60Hz: 1,475,600 pixels Maximum output height/width of a single output card: 16,384 pixels. Maximum load of a single output card: <ul style="list-style-type: none"> 8/10bit@60Hz: 17,694,720 pixels 12bit@60Hz: 11,804,800 pixels
MX_8x5G_Base-T		
		
Type	Qty	Description
5G Base-T	8	<ul style="list-style-type: none"> The maximum load of a single 5G Ethernet port is as follows. Please refer to Ethernet Port Load Capacity for more details: <ul style="list-style-type: none"> 8bit@60Hz: 2,951,200 pixels 10bit@60Hz: 2,291,312 pixels 12bit@60Hz: 1,475,600 pixels Maximum output height/width of a single output card: 16,384 pixels. Maximum load of a single output card: <ul style="list-style-type: none"> 8/10bit@60Hz: 17,694,720 pixels 12bit@60Hz: 11,804,800 pixels
MVR output card		
		
Type	Qty	Description
HDMI 2.0	1	<ul style="list-style-type: none"> Resolution: 3840×2160@60Hz (default) and 1920×1080@60Hz Output color format: RGB 4:4:4, 8 bit Frame rate: 60 Hz

12G-SDI	1	<ul style="list-style-type: none"> Resolution: 3840×2160@60Hz (default) and 1920×1080@60Hz Output color format: YCbCr 4:2:2, 10 bit Frame rate: 60 Hz
Control Card		
		
Type	Qty	Description
ETHERNET	2	<p>Gigabit Ethernet control ports. Support TCP/IP protocol and star connection.</p> <p>They have the same functions without priority and order, and can be connected to VMP software and central control devices. No switch or router is needed to deploy multiple devices on the same LAN via device cascading as the network switching function is already built in. Up to 20 MX6000 Pro can be cascaded.</p>
GENLOCK	1	<p>A pair of Genlock signal connectors. Support Bi-Level, Tri-Level, and Blackburst.</p> <ul style="list-style-type: none"> IN: Accept the sync signal LOOP: Loop the sync signal <p>The Genlock input signal supports a frame rate range from 23.98 Hz to 60 Hz. For standard Genlock signal generators, up to 20 MX6000 Pro can be cascaded.</p>
AUX	1	An auxiliary connector for connecting to central control devices (RS232).
SPDIF	1	<p>Digital audio output connector allows for selecting one audio channel from the connected input sources for output.</p> <div style="background-color: #cccccc; padding: 5px; margin-top: 10px;"> <p> Note</p> <p>The following input cards do not support audio output: MX_1×DP 1.4 (8K@60Hz), MX_4×12G-SDI, MX_1×ST 2110 (25G), MX_2×ST 2110 (25G), and MX_1×ST 2110 (100G).</p> </div>
Power		
Type	Qty	Description
100-127V~/200-240V~, 15A/10A, 50/60Hz	2	AC power input connector and switch

3 Applications

3.1 Solution Build

Based on the installed output cards (4x10G fiber output card/1x40G fiber output card/8x5G Ethernet output card), users can build 1G/5G solutions with different models of fiber converters and receiving cards. 1G/5G refers to the output bandwidth of a single Ethernet port. For more detailed information, please refer to [Ethernet Port Load Capacity](#).


Table 3-1 COEX system build

Solution	Output Card	Fiber Converter	Receiving Card
1G Solution	4x10G fiber output card	CVT10, CVT10 Pro	1G receiving cards such as A10s Pro
5G Solution	1x40G fiber output card	CVT8-5G	5G receiving cards such as XA50 Pro

Note


You can install different output cards on the same controller, but output cards with different Ethernet port bandwidths (1G/5G) cannot be used to load the same screen.

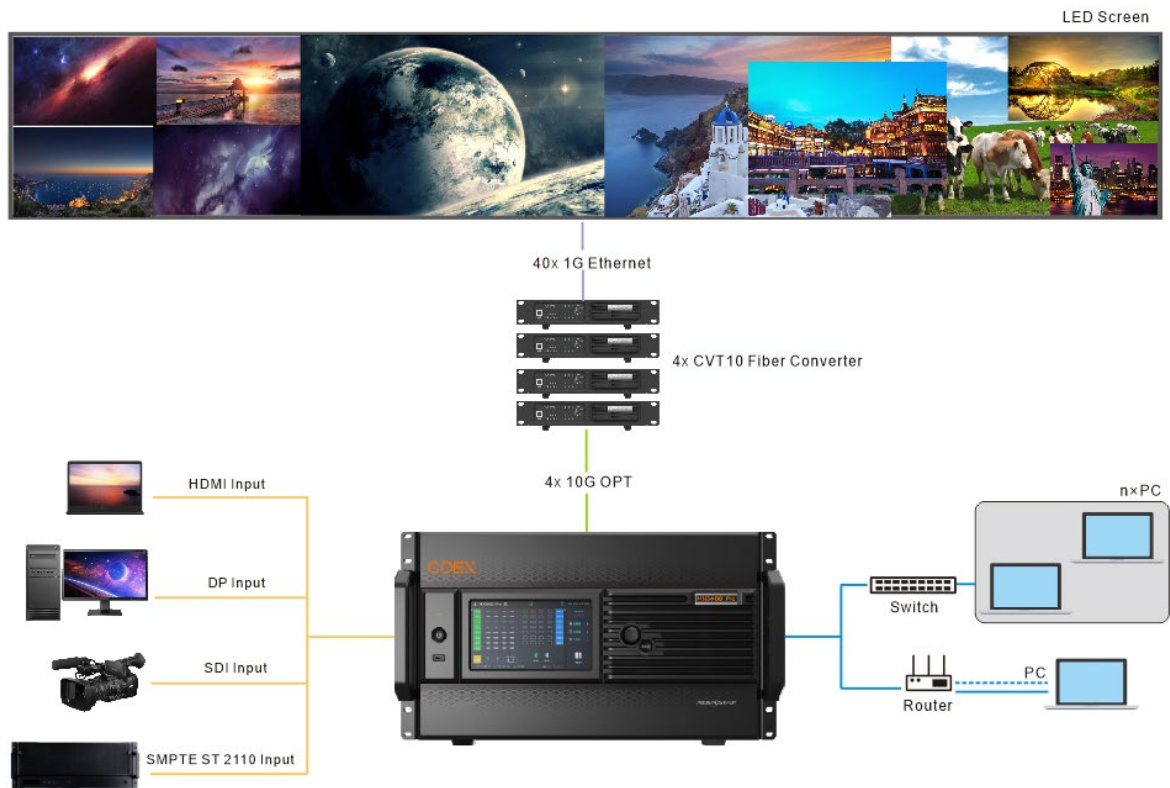3.2 1G Solution (4x10G Fiber Output Card)



This diagram is an example of four input cards and one 4x10G fiber output card installed on an MX6000 Pro. The actual application may vary.

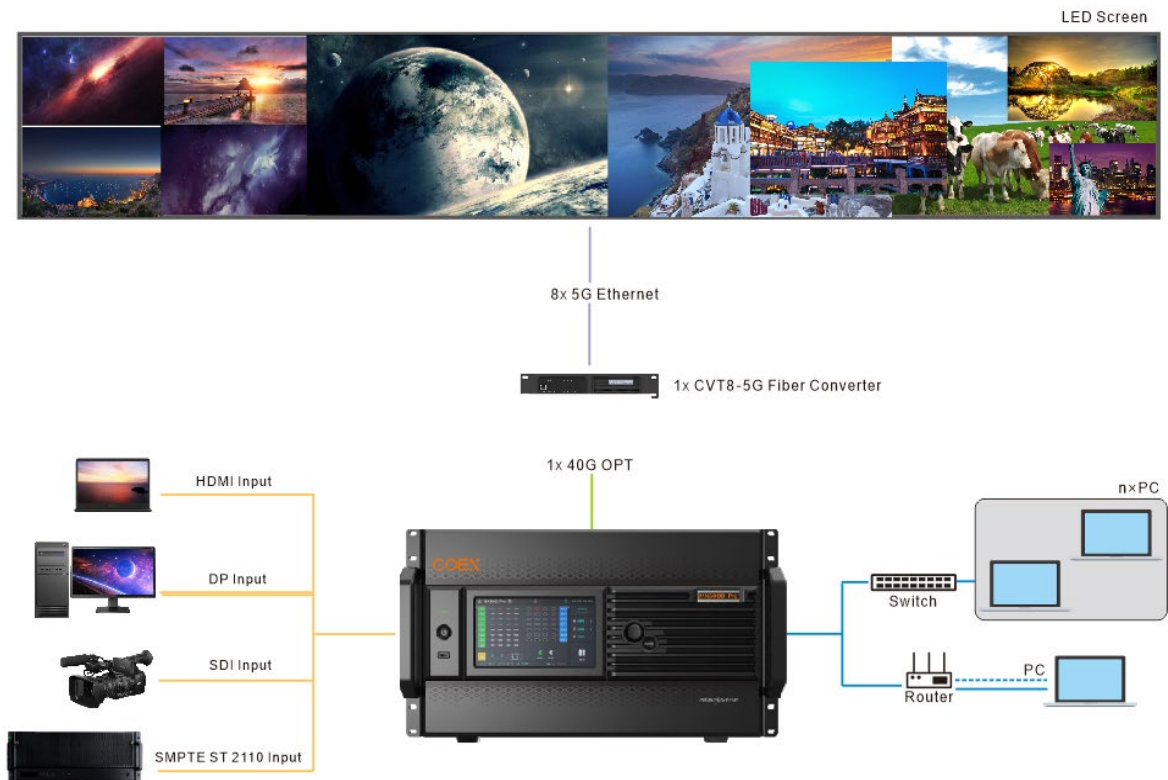3.3 5G Solution (1x40G Fiber Output Card)



This diagram is an example of four input cards and one 1x40G fiber output card installed on an MX6000 Pro. The actual application may vary.

4 Front Screen Panel

4.1 UI Introduction


4.1.1 Home Screen

After the device is powered on, the home screen showing device related information is displayed as [Figure 4-1](#). Rotate the knob to select an input or output card to view its details, as shown in [Figure 4-2](#).

Figure 4-1 Home screen





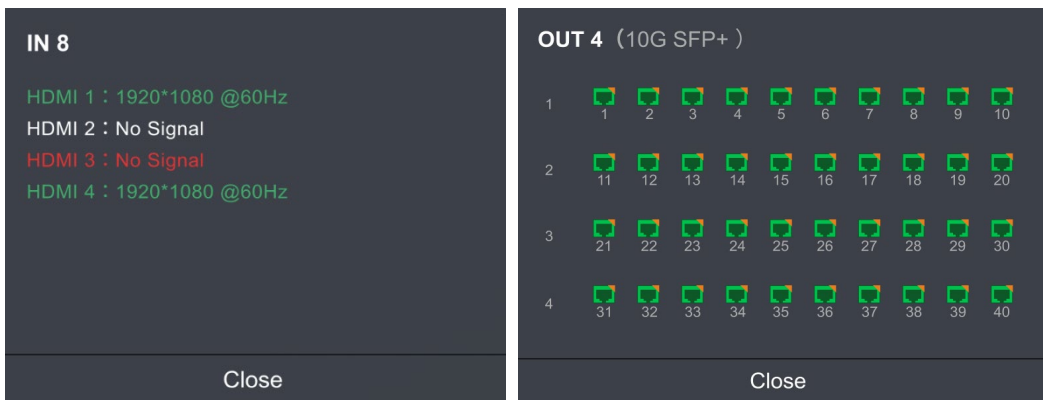


Figure 4-2 Input and output card details



The home screen is shown in [Figure 4-1](#) and the home screen descriptions are shown in [Table 4-1](#).

Table 4-1 Home screen descriptions

Area	Content	Description
Top line	MX6000 Pro	The device name. The name can be changed in VMP software.
		The device button and touchscreen lock status. <ul style="list-style-type: none"> • When the icon is displayed: The buttons are locked. • When the icon is not displayed: The buttons are unlocked Hold down the knob and BACK button simultaneously for 5s or longer to lock or unlock the buttons and screen.
		The connection status of the USB drive. <ul style="list-style-type: none"> • Green: Connected • When the icon is not displayed: Disconnected
	192.168.102.189	The device IP address
Input / Output	IN 1 to 8	The device input source type and status. <ul style="list-style-type: none"> • Green: The input source is connected. • Red: The input source is being used for the screen but not connected. • Gray: The input source is not connected.
	OUT 1 to 8	The status of the output Ethernet ports. <ul style="list-style-type: none"> • Green: The Ethernet port is connected and working normally. • Red: The Ethernet port is connected but working abnormally. • Gray: Disconnected When the Ethernet port, associated card, or associated device is used as a backup, you will see an orange triangular icon displayed in the top-right corner.
	MVR (Reserved)	The status of the MVR card ports.
Control	CTRL	The status of the control Ethernet port, AUX port, and GENLOCK port. <ul style="list-style-type: none"> • Green: Connected • Gray: Disconnected
Power Supply	PWR	The status of the device power supply. <ul style="list-style-type: none"> • Green: Connected • Gray: Disconnected
Bottom		The chassis fan speed.

Area	Content	Description
line		<ul style="list-style-type: none"> • Green: The fan speed is normal. • Yellow: Fan speed alarm. The speed has exceeded the threshold range. • Yellow: Fan speed alarm. The speed has exceeded the threshold range significantly.
		<p>The supply voltage of the mainboard.</p> <p>Meaning of numerical colors:</p> <ul style="list-style-type: none"> • Green: The voltage is normal. • Yellow: Voltage alarm. The voltage has exceeded the threshold range. • Red: Voltage alarm. The voltage has exceeded the threshold range significantly.
		<p>The temperature inside the chassis</p> <p>Meaning of numerical colors:</p> <ul style="list-style-type: none"> • Green: The temperature is normal. • Yellow: Temperature alarm. The temperature has exceeded the threshold range. • Red: Temperature alarm. The temperature has exceeded the threshold range significantly.
Right side	Genlock	The sync signal currently used.
	Screens	The number of screens with load.
	Blackout	The number of screens that are blacked out.
	Frozen	The number of screens that are frozen.
	Menu	The device main menu.

4.1.2 Main Menu

On the home screen, tap the menu icon at the bottom right or press the knob to enter the main menu page.

Figure 4-3 Main menu

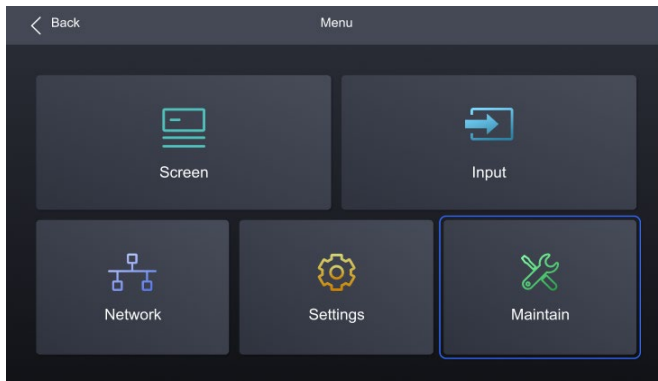







Table 4-2 Main menu descriptions

Module	Description
	Show screen name, sync signal source, and brightness. Set brightness, color temperature, gamma, as well as enable black screen or freeze screen.
	Set internal source, check external input source information, and configure EDID and HDR parameters for external input sources.
	Configure network parameters and third party protocol.
	Set LCD screen timeout and brightness, set system language and temperature scale, check firmware information, and restore factory settings.
	Perform device diagnostics, view and export logs, and check device status.

4.2 Screen


4.2.1 Set Brightness, Color Temperature and Gamma

Step 1 Select **Screen** from the main menu to access the screen list.

The list displays screen names, sync signal sources, and brightness.

Step 2 Select a screen to open the parameter settings.

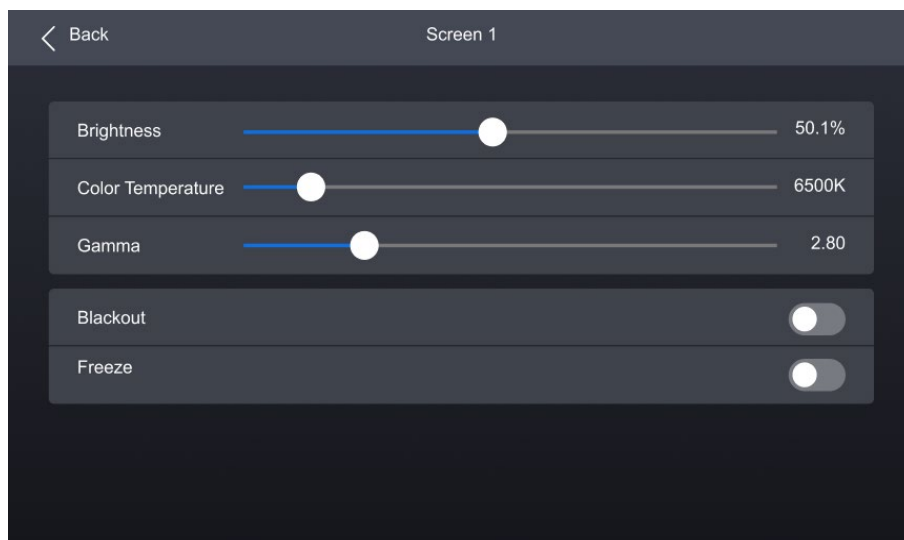Figure 4-4 Set Brightness, color temperature and gamma



Step 3 Adjust the values for brightness, color temperature and gamma.


4.2.2 Set Screen Status

Step 1 Select **Screen** from the main menu to access the screen list.


The list displays screen names, sync signal sources, and brightness.

Step 2 Select a screen to open the parameter settings.

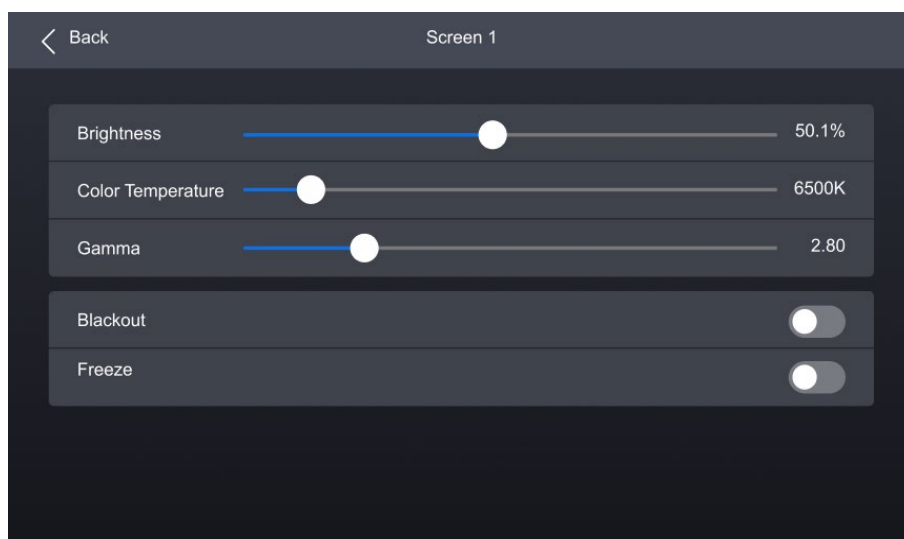Figure 4-5 Set screen status



Step 3 Select **Blackout** or **Freeze** and then press the knob to toggle on or off the switch.

- : Enabled. The screen display will turn black or freeze, but the playback will not be interrupted.

- : Disabled.


4.3 Input

4.3.1 Set Internal Source

Step 1 Select **Input** from the main menu to access the input source list.

Step 2 Select **Internal Source** to open the parameter settings.

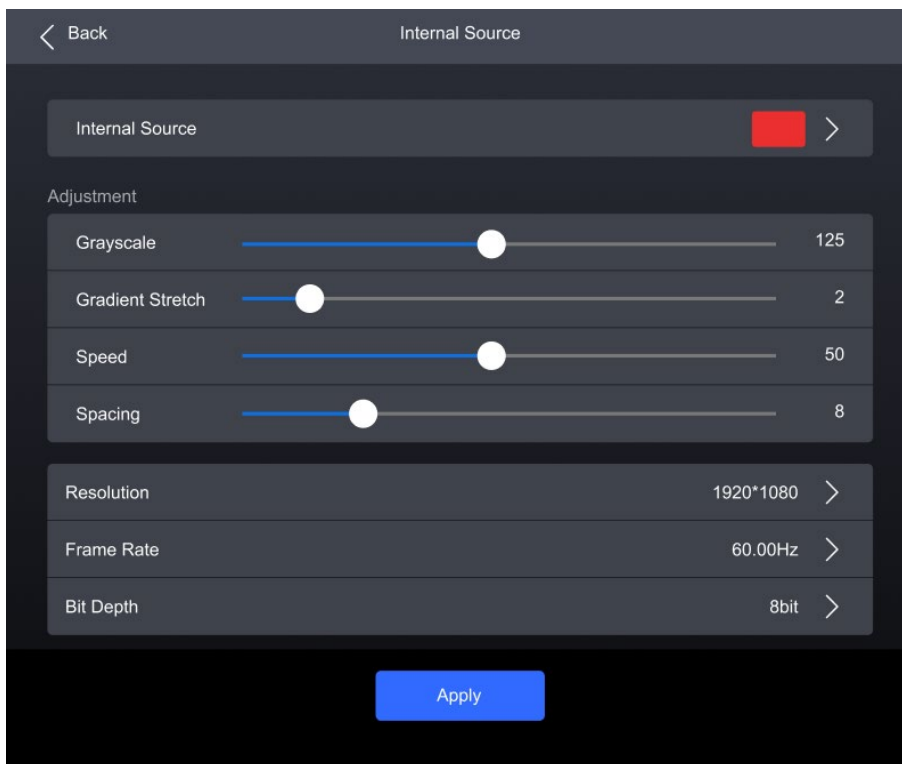Figure 4-6 Input source



Step 3 Select **Internal Source**, navigate to the sub-interface, and then select an image.

Step 4 Press **BACK** to return to the parameter settings.

Step 5 Set the **Grayscale**, **Gradient Stretch**, **Speed**, and **Space**. The adjustable parameters for each image may vary based on the interface.

Step 6 Select **Resolution**, **Frame Rate**, and **Bit Depth** in sequence and set a value for each in the pop-up dialog box.


Step 7 After the settings are done, click **Apply**.

4.3.2 Check Input Source Information

Step 1 Select **Input** from the main menu to access the input source list.

Step 2 Select an input source to access the **Information** tab.

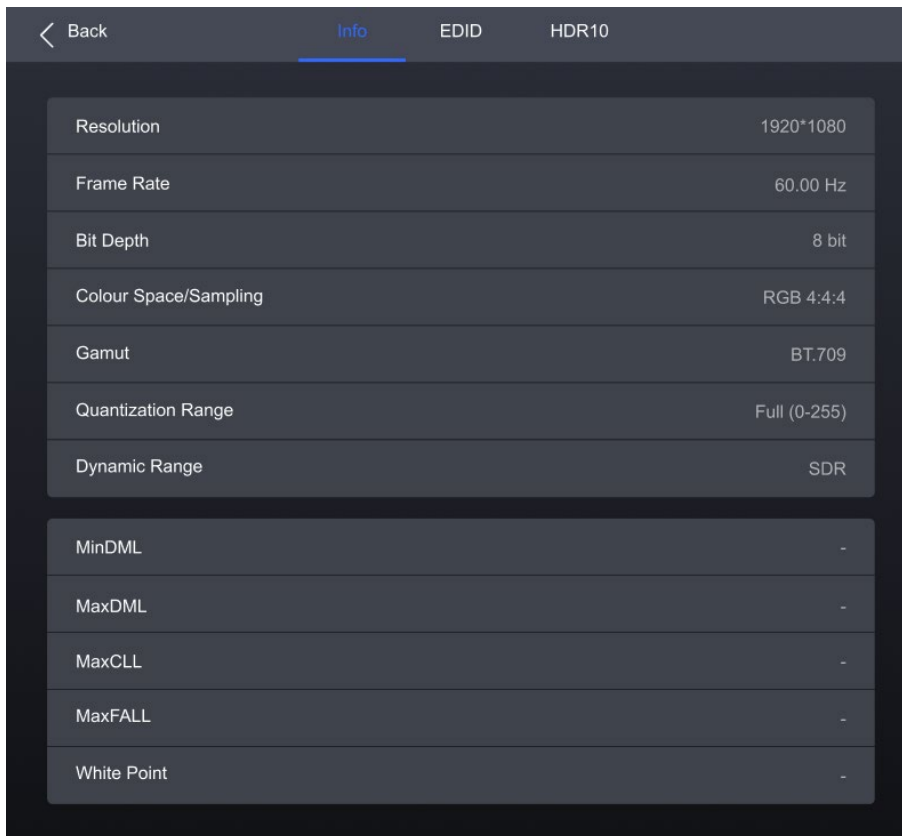Figure 4-7 Input source information



The screenshot shows a dark-themed user interface with a top navigation bar containing a back arrow, 'Back', and three tabs: 'Info' (selected), 'EDID', and 'HDR10'. Below the navigation bar is a list of technical specifications for an input source, presented in a table format with a light grey background for the text.

Resolution	1920*1080
Frame Rate	60.00 Hz
Bit Depth	8 bit
Colour Space/Sampling	RGB 4:4:4
Gamut	BT.709
Quantization Range	Full (0-255)
Dynamic Range	SDR
MinDML	-
MaxDML	-
MaxCLL	-
MaxFALL	-
White Point	-

Step 3 Check the input source information.


4.3.3 Set EDID

Step 1 Select **Input** from the main menu to access the input source list.

Step 2 Select an input source to open the parameter settings.

Step 3 Navigate to the **EDID** tab.

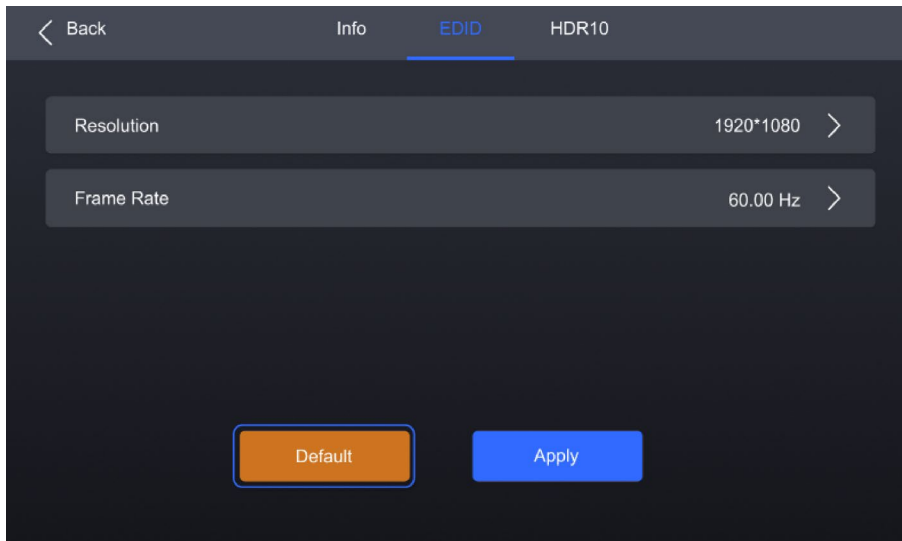Figure 4-8 EDID



Step 4 Select **Resolution** and **Frame Rate** in sequence and set a value for each in the pop-up dialog box.

Step 5 After the settings are done, click **Apply**.


4.3.4 Set HDR

Step 1 Select **Input** from the main menu to access the input source list.

Step 2 Select an input source to open the parameter settings.

Step 3 Navigate to the **HDR10** tab.

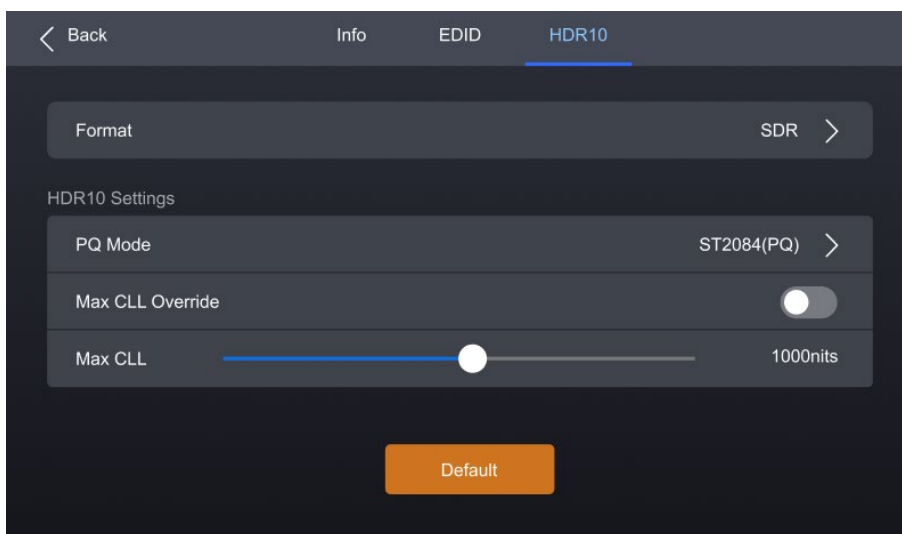Figure 4-9 HDR10



Step 4 Select **Format** and then select **Auto**, **HDR10**, **HLG**, or **Close** from the pop-up dialog box.

Step 5 For HDR10, please set the relevant parameters.


- **PQ Mode:** The mapping method of video source brightness.
 - ST2084 (PQ): This mode 1:1 maps the brightness of the video source. The part that exceeds the maximum screen brightness will still be displayed as the maximum brightness.
 - ST2086 (Linear mapping): This mode linearly maps the brightness of the video source. It globally adjust the video source brightness according to the maximum screen brightness to ensure that the ratio of the brightness of the entire source content remains unchanged.
- **Max CLL Override:** Enable or disable Max CLL override.
- **Max CLL:** The max content light level.

4.4 Communication



4.4.1 Network

Step 1 Select **Communication** > **Network** from the main menu to access the network settings interface.

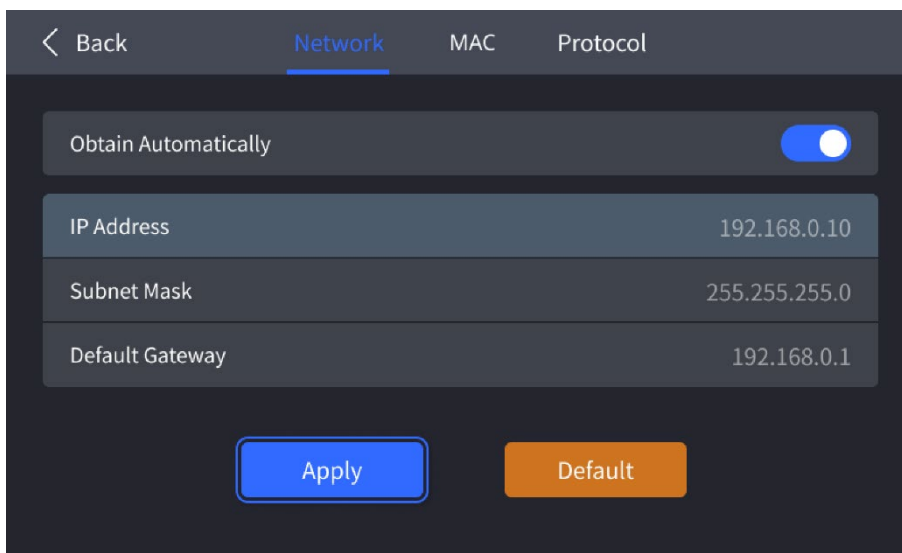Figure 4-10 Network



Step 2 Toggle on or off **Obtain Automatically**.

- : The device automatically obtain an IP address.
- : You need to manually set an IP address for the device.


Step 3 If **Obtain Automatically** is disabled, you need to set an **IP Address**, **Subnet Mask** and **Default Gateway**. If it is enabled, this step is not required.

Step 4 After the settings are done, click **Apply**.

4.4.2 MAC Address

Step 1 Select **Communication** > **MAC** from the main menu to access the MAC address interface.

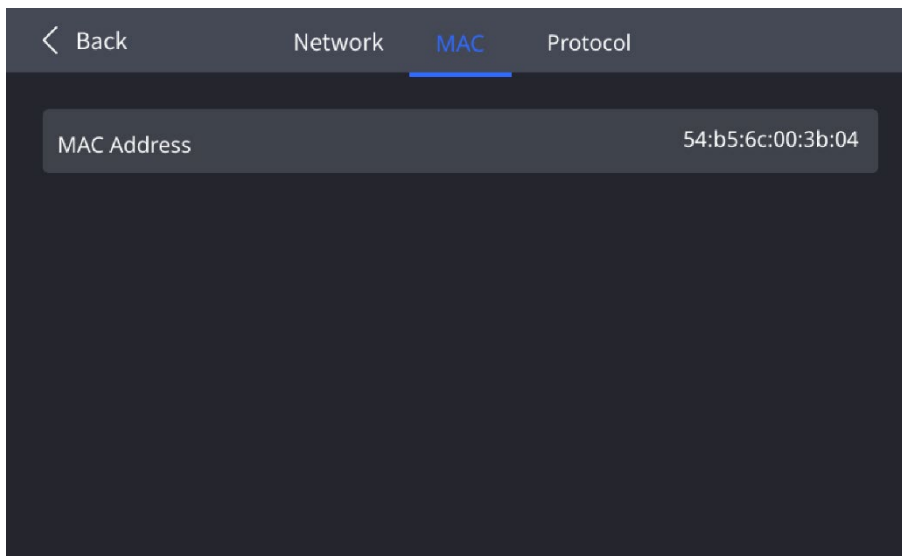Figure 4-11 MAC address




Step 2 You can view the device MAC address here. It can serve as a unique identifier to locate each device in situations like network communication, device management, and security control.



4.4.3 Protocol

Step 1 Select **Communication** > **Protocol** from the main menu to access the protocol settings interface.

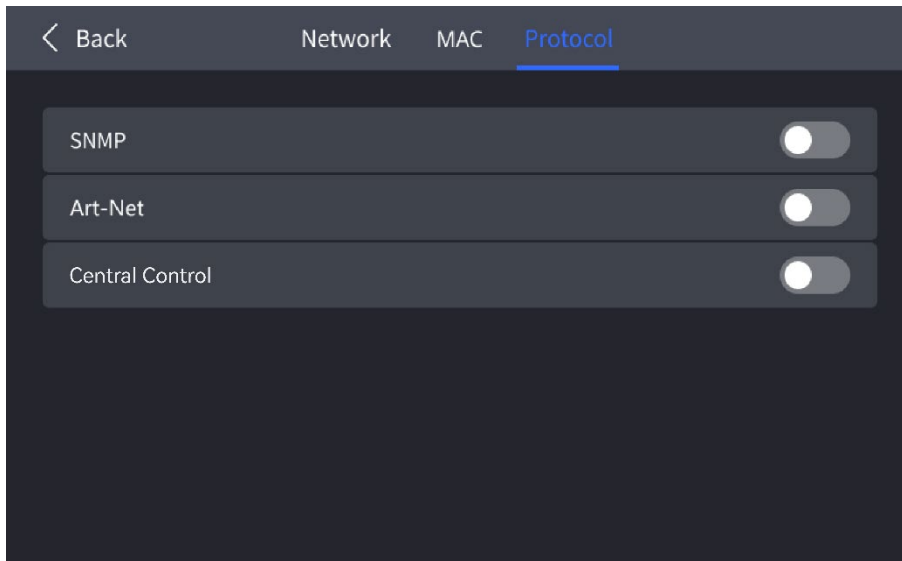Figure 4-12 Protocol



Step 2 Toggle on or off **SNMP**, **Art-Net**, or **Central Control**.

- : Enable the protocol.
- : Disable the protocol.

Note


For more details, please refer to *SNMP Instructions*, *Art-Net Instructions*, and *Central Control Instructions*.

4.5 Settings

4.5.1 Configure LCD Screen

Step 1 Select **Settings** from the main menu to access the system settings interface.

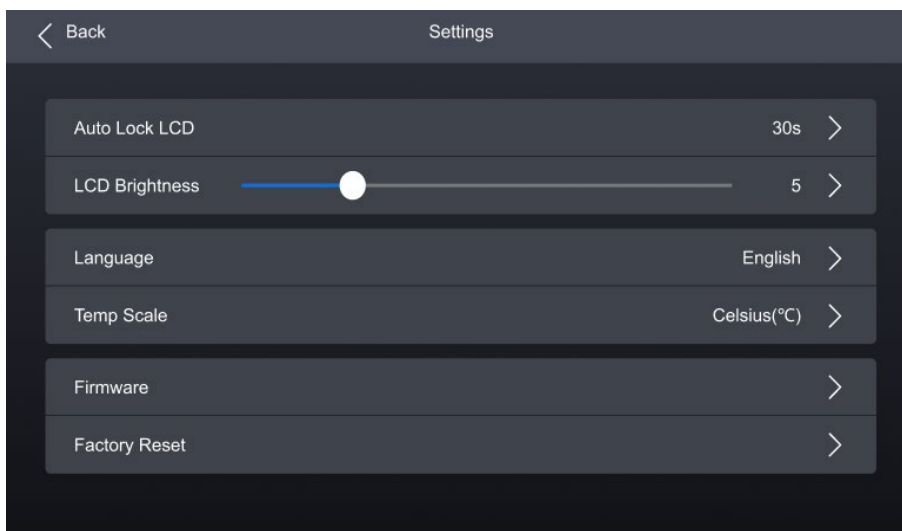Figure 4-13 Configure LCD screen



Step 2 Select **Auto Lock LCD** and set a value in the pop-up dialog box.


Step 3 Select **LCD Brightness** and adjust the value.

4.5.2 Setting Language

Step 1 Select **Settings** from the main menu to access the system settings interface.

Step 2 Select **语言/Language** to open the sub-interface.

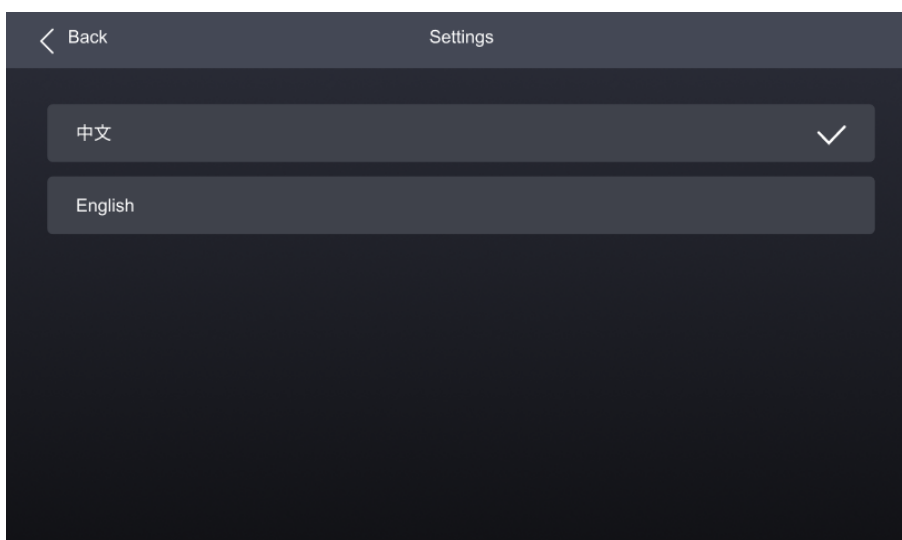Figure 4-14 Language settings




Step 3 Select **中文** or **English**.

4.5.3 Set Temperature Scale

Step 1 Select **Settings** from the main menu to access the system settings interface.

Step 2 Select **Temp Scale** and then select **Celsius (°C)** or **Fahrenheit (°F)** from the pop-up dialog box.

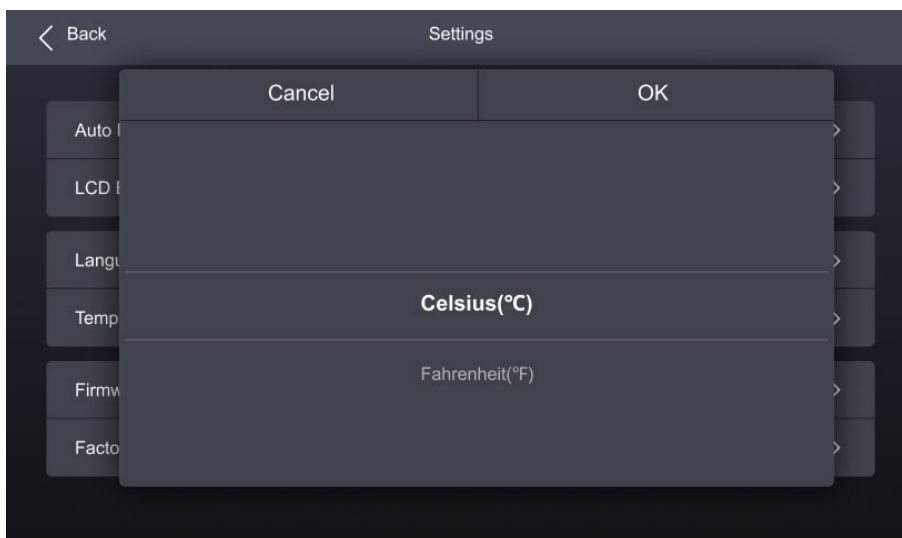
Figure 4-15 Set temperature scale



4.5.4 Check Firmware Information

Step 1 Select **Settings** from the main menu to access the system settings interface.

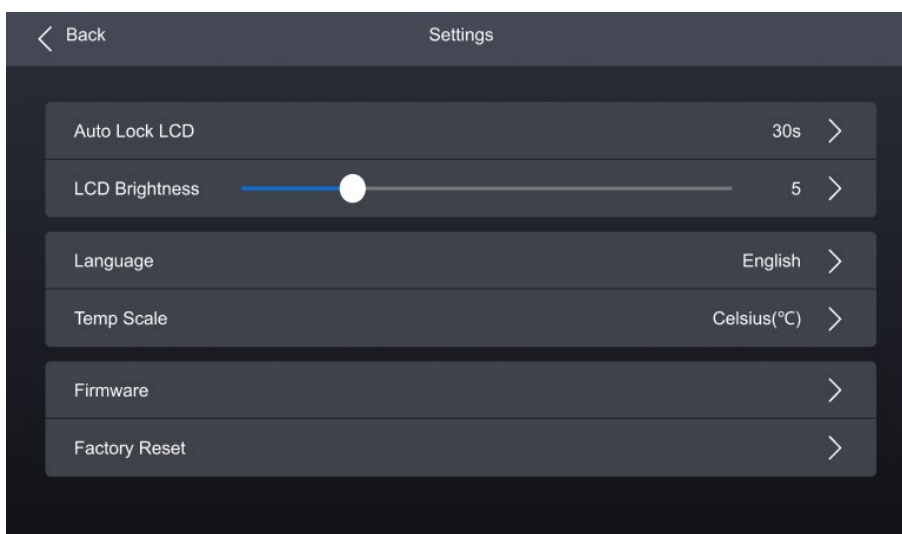Figure 4-16 Check firmware information



Step 2 Select **Firmware** to open the sub-interface.


Step 3 Select **Controller**, **Input Card**, and **Output Card** to check the related information.

4.5.5 Factory Reset

Step 1 Select **Settings** from the main menu to access the system settings interface.

Step 2 Select **Factory Reset** and then select **Keep user data** or **Reset All** from the pop-up dialog box. Finally, select **OK**.

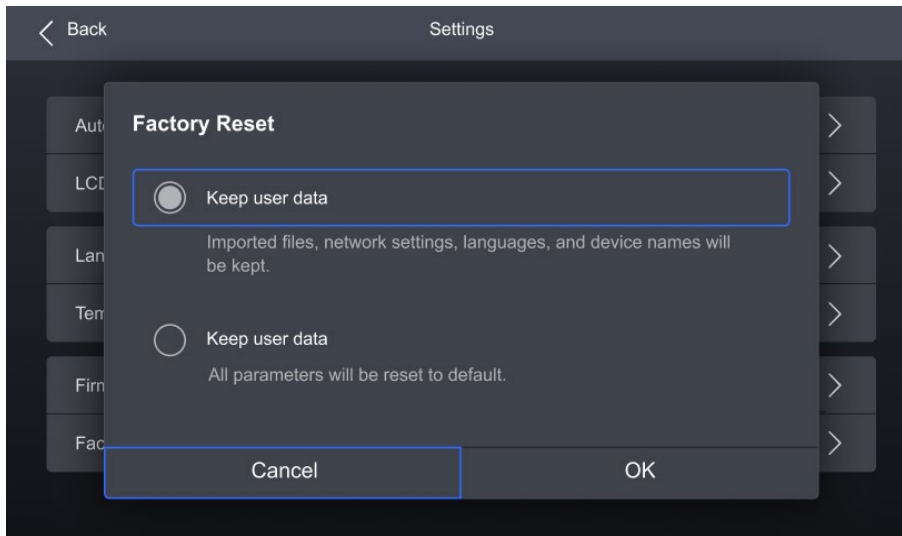Figure 4-17 Factory reset



4.6 Maintenance

4.6.1 Diagnostics

Upon Powering UP

When the device is powered on, it automatically conducts a diagnostic process:


- Normal startup: All functions of the MX6000 Pro are available for use.
- Abnormal startup: Depending on the displayed error message, you can choose to export the diagnostic results or continue to operate in a limited functionality state.

Maintenance

To export the diagnostics log, insert a USB drive to the USB port on the front panel of the device.

Step 1 Select **Maintain** from the main menu to access the settings interface.

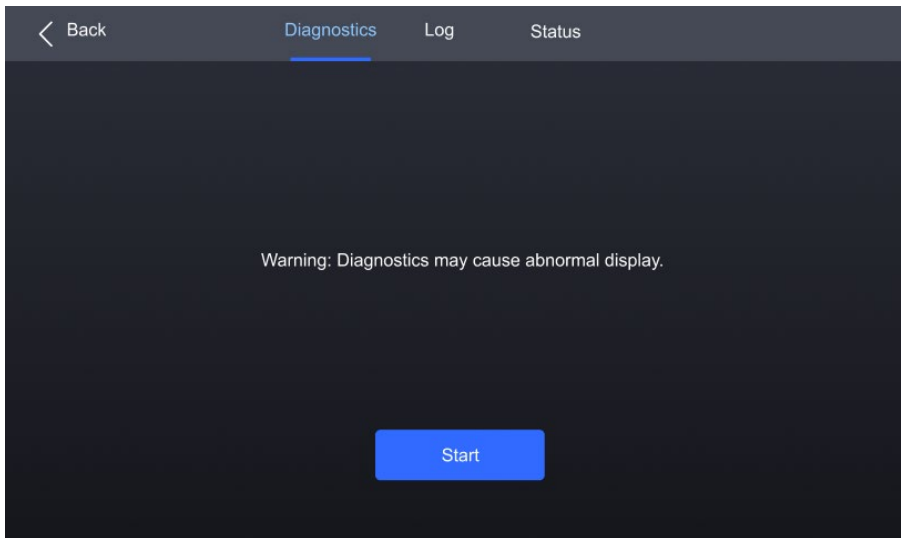Figure 4-18 Diagnostics



Step 2 Navigate to the **Diagnostics** tab and select **Start**.

Step 3 Once the diagnostic process is completed, select **Details** to check the diagnostic result. You can also select **Export** to export the result into a USB drive.


4.6.2 View and Export Logs

To export the logs, insert a USB drive to the USB port on the front panel of the device.

Step 1 Select **Maintain** from the main menu to access the settings interface.

Step 2 Navigate to the **Log** tab to check the device logs.

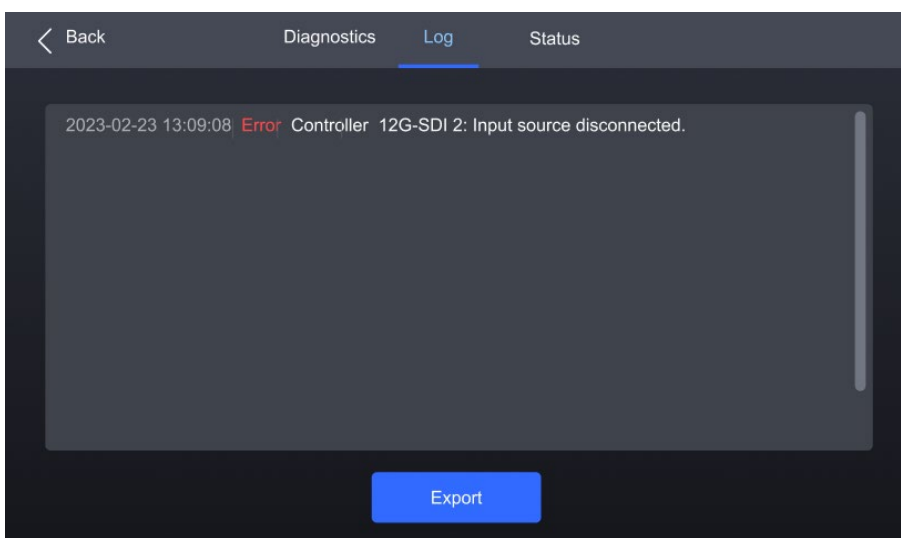Figure 4-19 Device log




Step 3 Select **Export** to export the logs into a USB drive.

4.6.3 Check Device Status

Step 1 Select **Maintain** from the main menu to access the settings interface.

Step 2 Navigate to the **Status** tab to check the device status.

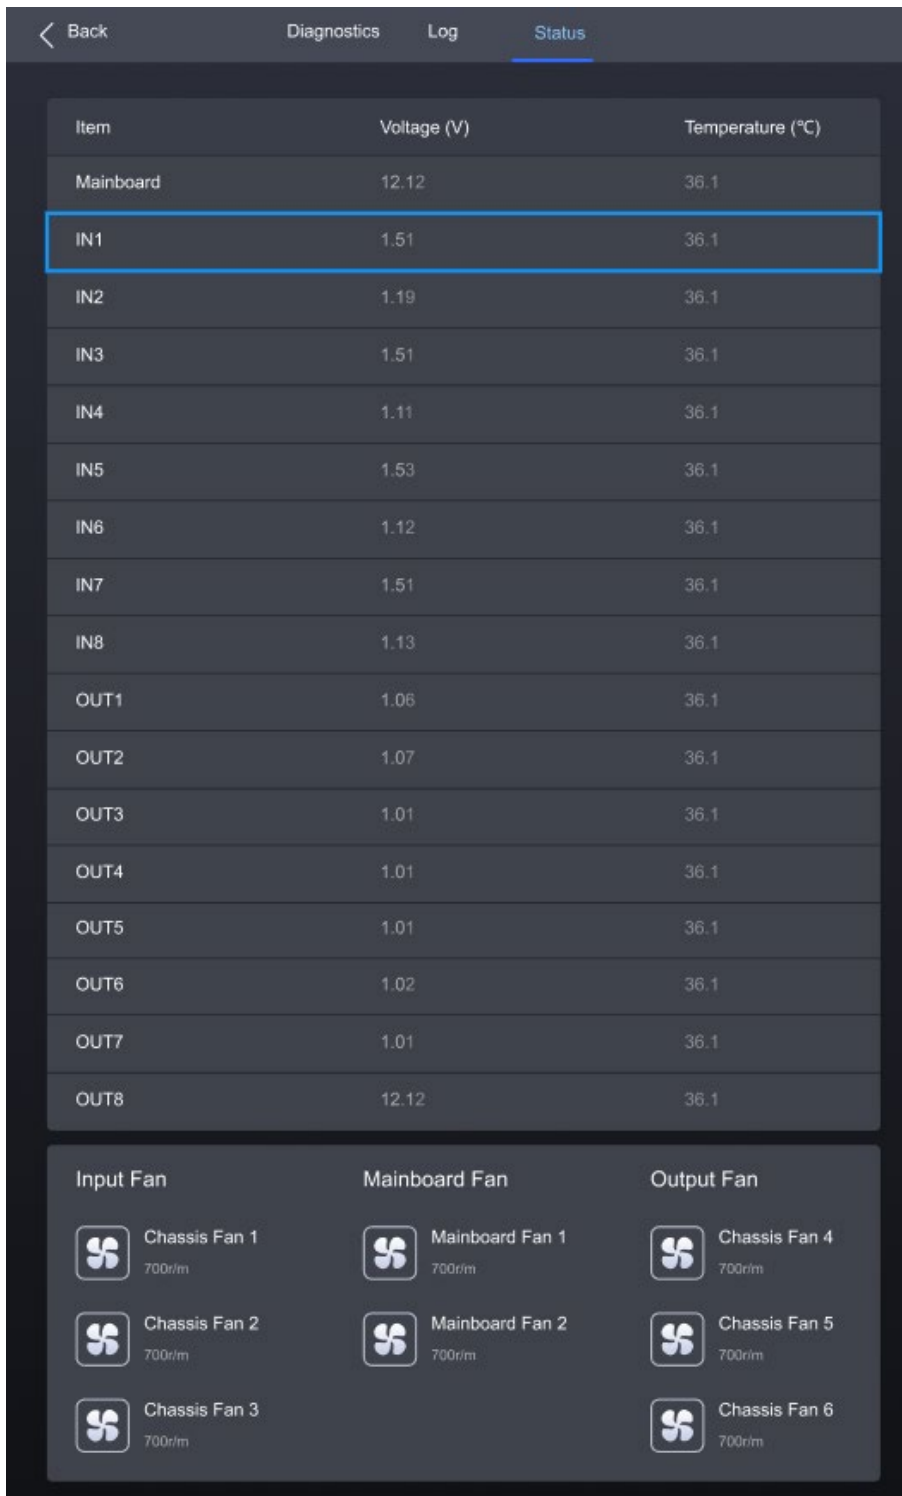Figure 4-20 Check device status



The screenshot displays the 'Status' tab of the device settings interface. At the top, there are navigation options: 'Back', 'Diagnostics', 'Log', and 'Status' (which is selected). Below the navigation is a table with three columns: 'Item', 'Voltage (V)', and 'Temperature (°C)'. The table lists various components and their corresponding voltage and temperature readings. The 'IN1' row is highlighted with a blue border. Below the table, there are three sections for fan status: 'Input Fan', 'Mainboard Fan', and 'Output Fan'. Each section contains three fan icons with their respective labels and speeds (700r/m).



Item	Voltage (V)	Temperature (°C)
Mainboard	12.12	36.1
IN1	1.51	36.1
IN2	1.19	36.1
IN3	1.51	36.1
IN4	1.11	36.1
IN5	1.53	36.1
IN6	1.12	36.1
IN7	1.51	36.1
IN8	1.13	36.1
OUT1	1.06	36.1
OUT2	1.07	36.1
OUT3	1.01	36.1
OUT4	1.01	36.1
OUT5	1.01	36.1
OUT6	1.02	36.1
OUT7	1.01	36.1
OUT8	12.12	36.1

Input Fan	Mainboard Fan	Output Fan
Chassis Fan 1 700r/m	Mainboard Fan 1 700r/m	Chassis Fan 4 700r/m
Chassis Fan 2 700r/m	Mainboard Fan 2 700r/m	Chassis Fan 5 700r/m
Chassis Fan 3 700r/m		Chassis Fan 6 700r/m

5 VMP Operations

Users can only perform some basic operations on the MX6000 Pro LCD screen. To perform more operations such as project management, input source configuration, screen configuration, screen calibration, color processing, screen adjustment, screen monitoring, preset management, and screen maintenance, please install Vision Management Platform (VMP) on the control PC and refer to the *Vision Management Platform User Manual*.

6 Specifications

Electrical Specifications	Power supply	100-127V~/200-240V~, 15A/10A, 50/60Hz
	Max power consumption	820 W  Note As this product is a card-based controller, the stated power consumption represents the maximum for a fully configured unit. Actual consumption varies with the input/output cards installed. Please refer to the relevant card specifications for details.
Operating Environment	Temperature	-5°C to +45°C
	Humidity	0% RH to 80% RH, non-condensing
Storage Environment	Temperature	-30°C to +80°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 282.9 mm × 538.8 mm (foot pad included)
	Weight	<ul style="list-style-type: none"> • Net weight: 21.5 kg (chassis weight only) • Total weight: 22.4 kg (including the chassis, accessories, and packaging materials)  Note Since this product is a card-based controller, the weight provided in the specifications refers to the chassis only (excluding input and output cards). The actual total weight will depend on the cards used, and their weights can be found in their respective specifications.
Packing Information	Packing box	725.0 mm × 635.0 mm × 410.0 mm , kraft paper box
	Accessories	2x Power cord, 1x Ethernet cable, 1x HDMI 2.1 cable, 1x DP 1.4 cable 1x Quick Start Guide, 1x Customer Letter, 1x Safety Manual 1x Certificate of Approval
IP Rating		IP20 (Please prevent the product from water intrusion and do not wet or wash the product).
Noise Level (typical at 25°C/77°F)		43.0 dB (A)

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

7 Video Source Specifications

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)		
HDMI 2.0	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	12bit	24/25/30		
					10bit	24/25/30/48/50		
					8bit	24/25/30/48/50/60		
			YCbCr	4:2:2	8/10/12bit	30/48/50/60		
					4:2:0		8/10/12bit	
					4:2:0	8/10/12bit	30/48/50/60	
	3840×2160	RGB / YCbCr	4:4:4	12bit		24/25/30		
				10bit		24/25/30/48/50		
				8bit	24/25/30/48/50/60			
	YCbCr	4:2:2	8/10/12bit	48/50/60				
			4:2:0		8/10/12bit			
			4:2:0	8/10/12bit	48/50/60			
	2K1K	2560×1440	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75		
					10bit	24/25/30/48/50/60/75/100		
8bit					24/25/30/48/50/60/75/100/120			
YCbCr					4:2:2	8/10/12bit	75/100/120	
						4:2:0		8/10/12bit
						4:2:0	8/10/12bit	75/100/120
1920×1080		RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/72/75/100/120/144			
				10bit	24/25/30/48/50/60/72/75/100/120/144/240			
				8bit				
				YCbCr	4:2:2	8/10/12bit	120/144/240	
4:2:0	8/10/12bit							
HDMI 2.1	8K	8192×4320 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30		
					YCbCr		4:2:2	8/10/12bit
								4:2:0
		7680×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30		
					8/10/12bit	24/25/30		

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)			
		(Forced)	YCbCr	4:2:2	8/10/12bit				
				4:2:0	8/10/12bit				
	5K	5120×2880 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75			
				YCbCr	4:2:2		8/10/12bit		
					4:2:0		8/10/12bit		
	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120			
				YCbCr	4:2:2		8/10/12bit		
					4:2:0		8/10/12bit	30/48/50/60/75/100/120	
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120 (75 Hz and above need to be forced)			
				YCbCr	4:2:2		8/10/12bit		
					4:2:0		8/10/12bit	48/50/60/75/100/120	
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240 (144 Hz and above need to be forced)			
				YCbCr	4:2:2		8/10/12bit		
					4:2:0		8/10/12bit	75/100/120/144/240	
1920×1080		RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240 (240 Hz needs to be forced)				
			YCbCr	4:2:2		8/10/12bit			
				4:2:0		8/10/12bit	120		
DP 1.2	4K	4096×2160 (Forced)	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50			
					10bit	24/25/30/48/50/60			
					8bit	24/25/30/48/50/60/75			
			YCbCr	4:2:2	8/10/12bit				
				3840×2160	RGB / YCbCr		4:4:4	12bit	24/25/30/48/50
								10bit	24/25/30/48/50/60
		8bit	24/25/30/48/50/60/75						
		YCbCr	4:2:2	8/10/12bit	(75 Hz needs to be forced)				
	2K1K	2560×1440	RGB /	4:4:4	12bit	24/25/30/48/50/60/75/100			

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)		
			YCbCr		10bit	24/25/30/48/50/60/75/100/120		
					8bit	24/25/30/48/50/60/75/100/120/144 (144 Hz needs to be forced)		
			YCbCr	4:2:2	8/10/12bit			
			1920×1080	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144 (144 Hz needs to be forced)	
						10bit		
						8bit		24/25/30/48/50/60/75/100/120/144/240 (240 Hz needs to be forced)
		YCbCr	4:2:2	8/10/12bit				
		DP 1.4	8K	8192×4320 (Forced)	RGB / YCbCr	4:4:4	12bit	Not supported
							10bit	
							8bit	
YCbCr	4:2:2				8/10/12bit			
	4:2:0				8/10/12bit			
7680×4320 (Forced)	RGB / YCbCr				4:4:4	12bit	Not supported	
				10bit		24		
				8bit		24/25/30		
				YCbCr			4:2:2	8/10/12bit
YCbCr	4:2:0			8/10/12bit				
5K	5120×2880 (Forced)		RGB / YCbCr	4:4:4	12bit	24/25/30		
					10bit	24/25/30/48/50		
					8bit	24/25/30/48/50/60		
					YCbCr		4:2:2	8/10/12bit
							4:2:0	8/10/12bit
					4K		4096×2160 (Forced)	RGB / YCbCr
			10bit	24/25/30/48/50/60/75				
			8bit	24/25/30/48/50/60/75/100				
		YCbCr	4:2:2			8/10/12bit		
		YCbCr	4:2:0	8/10/12bit	30/48/50/60			
3840×2160	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60				
			10bit	24/25/30/48/50/60/75				

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)				
			YCbCr	4:2:2	8bit	(75 Hz needs to be forced)				
					12bit	24/25/30/48/50/60/75/100/120				
			4:2:0	8/10bit	(75 Hz and above need to be forced)					
				8/10/12bit	48/50/60					
	2K1K	2560×1440	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144				
					10bit	(144Hz needs to be forced)				
					8bit	24/25/30/48/50/60/75/100/120/144/240				
					8/10/12bit	(144Hz and above need to be forced)				
			YCbCr	4:2:2	8/10/12bit	75/100/120				
					4:2:0	8/10/12bit	75/100/120			
						8/10/12bit	120/144			
					1920×1080	RGB / YCbCr	4:4:4	12bit	24/25/30/48/50/60/75/100/120/144/240	
	10bit	(240Hz needs to be forced)								
	8bit	(240Hz needs to be forced)								
YCbCr	4:2:2	8/10/12bit	120/144							
		4:2:0	8/10/12bit	120/144						
			8/10/12bit	120/144						
DP 1.4 (8K)	8K	7680×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60				
					YCbCr	4:2:2	8/10/12bit	24/25/30/48/50/60		
							4:2:0	8/10/12bit	24/25/30/48/50/60	
			5K	5120×2880	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120		
							YCbCr	4:2:2	8/10/12bit	24/25/30/48/50/60/75/100/120
									4:2:0	8/10/12bit
	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144				
					YCbCr	4:2:2	8/10/12bit	24/25/30/48/50/60/75/100/120/144		
							4:2:0	8/10/12bit	24/25/30/48/50/60/75/100/120/144	
			3840×2160	RGB / YCbCr	4:4:4	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240		
							YCbCr	4:2:2	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240
									4:2:0	8/10/12bit

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240	
			YCbCr	4:2:2	8/10/12bit		
				4:2:0	8/10/12bit		
	1920×1080	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/75/100/120/144/240		
		YCbCr	4:2:2	8/10/12bit			
			4:2:0	8/10/12bit			
12G-SDI	4K	4096×2160	YCbCr	4:2:2	10bit	24/25/30/48/50/60	
		3840×2160					
	2K1K	2048×1080					
		1920×1080					
ST 2110 (25G)	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	
			YCbCr	4:2:2			
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60
			YCbCr	4:2:2			
	2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144	
			YCbCr	4:2:2			
		1920×1080	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60/100/120/144/240
			YCbCr	4:2:2			
	720P	1280×720	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		800×600	RGB / YCbCr	4:4:4	8/10/12bit		24/25/30/48/50/60/100/120/144/240
			YCbCr	4:2:2			
ST 2110 (100G) -	8K	8192×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)	
1x source			YCbCr	4:2:2			
		7680×4320	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	
			YCbCr	4:2:2			
	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		3840×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		2K1K	2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240
				YCbCr	4:2:2		
	1920×1080		RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
	ST 2110 (100G) - 4 sources	4K	4096×2160	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60
YCbCr				4:2:2			
3840×2160			RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60	
			YCbCr	4:2:2			
2K1K			2560×1440	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144
				YCbCr	4:2:2		
		1920×1080	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
720P		1280×720	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	
			YCbCr	4:2:2			
		800×600	RGB / YCbCr	4:4:4	8/10/12bit	24/25/30/48/50/60/100/120/144/240	

Input	Resolution		Color Space	Sampling	Bit Depth	Integer Frame Rate (Hz)
			YCbCr	4:2:2		

 Note

- The table above only displays a selection of common resolutions and integer frame rates. Decimal frame rates are also supported, allowing for automatic frame rate adaptation from the highest frame rate of each resolution down to 23.98/29.97/47.95/59.94/71.93/119.88/143.86Hz. The ST 2110 input interface can support a 95.50 Hz frame rate but does not support 71.93 Hz.
 - When using YCbCr 4:2:0 input, all frame rates need to be forced. Standard graphics cards only support a 4K resolution at 50/60 Hz. Other resolutions and frame rates require a source device that supports this color space and sampling to be forced.
-

8 Ethernet Port Load Capacity

8.1 1G Solution (4x10G Fiber Output Card)

When working with the A10s Pro/A8s Pro and their derivative receiving cards, the formula of calculating the load capacity per Ethernet port and the detailed parameters are as follows. When working with other Armor series receiving cards, custom receiving card firmware is required to support 10/12-bit depth.


- 8bit: Load capacity $\times 24 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$
- 10bit: Load capacity $\times 32 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$
- 12bit: Load capacity $\times 48 \times$ Frame rate $< 1000 \times 1000 \times 1000 \times 0.95$

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
24 Hz	1,649,306	1,236,979	824,653
25 Hz	1,583,333	1,187,500	791,667
30 Hz	1,319,444	989,583	659,722
50 Hz	791,667	593,750	395,833
60 Hz	659,722	494,792	329,861
120 Hz	329,861	247,396	164,931
144 Hz	274,884	206,163	137,442
240 Hz	164,931	123,698	82,465
300 Hz	131,944	95,958	65,972
360 Hz	109,954	82,465	54,977
480 Hz	82,465	61,849	41,232

Note

To achieve the maximum load capacity, the width of each rectangular load area within a single Ethernet port must be at least 128 pixels. If the width of a rectangular load area within the Ethernet port is less than 128, the loss in capacity is calculated as (128 - width of the rectangular

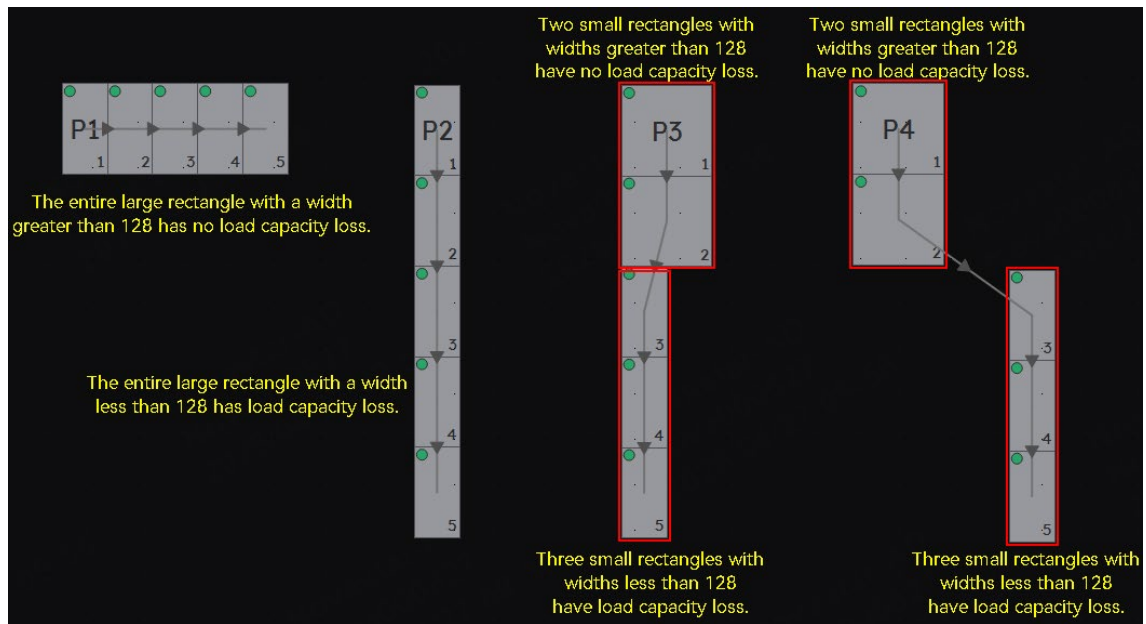load area) × height of the rectangular load area. The total load capacity loss for the Ethernet port is the sum of the losses for all rectangular load areas within the port.



8.2 5G Solution (1x40G Fiber Output Card)

When working with the XA50 Pro and CA50E receiving cards, the formula of calculating the load capacity per Ethernet port and the detailed parameters are as follows:


- 8bit: Load capacity × 24 × Frame rate < 5G × 0.85
- 10bit: Load capacity × 32 × Frame rate < 5G × 0.88
- 12bit: Load capacity × 48 × Frame rate < 5G × 0.85

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
24 Hz	7,378,000	5,728,280	3,689,000
25 Hz	7,082,800	5,499,149	3,541,440
30 Hz	5,902,400	4,582,624	2,951,200
50 Hz	3,541,440	2,749,574	1,770,720
60 Hz	2,951,200	2,291,312	1,475,600
120 Hz	1,475,600	1,145,656	737,800
144 Hz	1,229,600	954,713	612,374
240 Hz	737,800	572,828	368,900

Max Load Capacity per Ethernet Port (Pixels)			
Frame Rate / Bit Depth	8bit	10bit	12bit
300 Hz	590,240	458,262	295,120
360 Hz	491,800	381,885	245,900
480 Hz	368,900	286,414	184,450

 Note

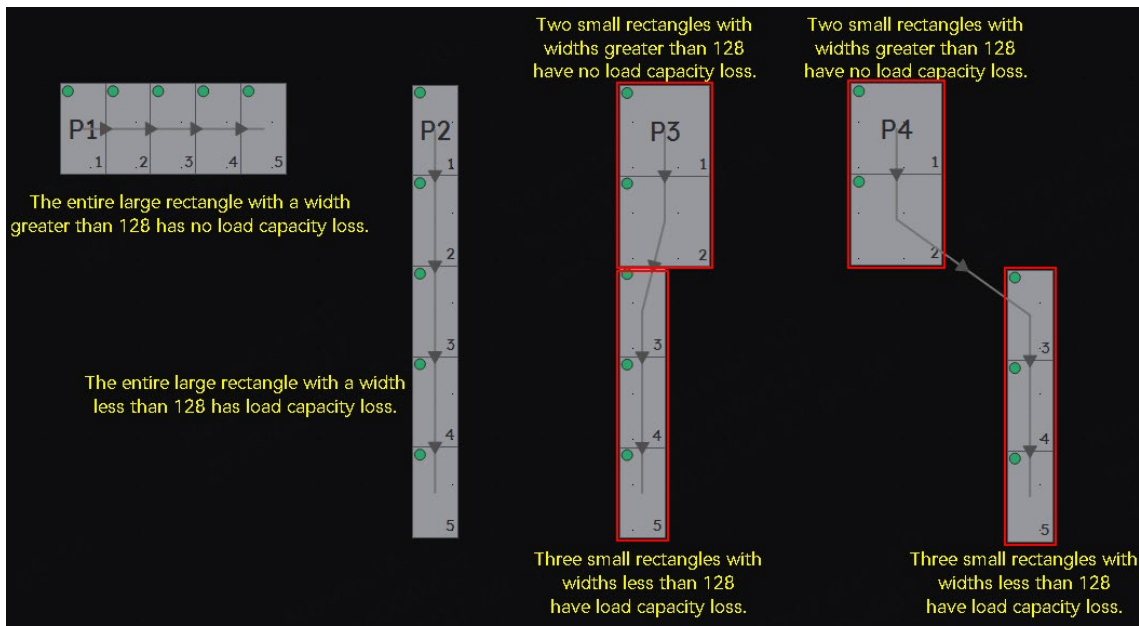To achieve the maximum load capacity, the width of each rectangular load area within a single Ethernet port must be at least 128 pixels. If the width of a rectangular load area within the Ethernet port is less than 128, the loss in capacity is calculated as (128 - width of the rectangular load area) × height of the rectangular load area. The total load capacity loss for the Ethernet port is the sum of the losses for all rectangular load areas within the port.



9 Copyright

Copyright © 2026 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| Official website
| www.novastar.tech

| Technical support
| support@novastar.tech